

MARCH, 1960




AMATEUR RADIO  
AMATEUR RADIO  
AMATEUR RADIO  
AMATEUR RADIO

# AEGIS

*Australia's own dependable brand of*  
**STEREO & HI-FIDELITY UNITS!**

AEGIS 5/10 ULTRA LINEAR BASIC AMP.  
AEGIS AMPLIFIER CONTROL UNIT  
AEGIS PRE-AMPLIFIER Mark 1  
AEGIS PRE-AMPLIFIER Mark 2  
AEGIS FIDELITY TUNER Mark 2  
AEGIS FIDELITY TUNER Mark 1  
incorporating its OWN POWER SUPPLY  
AEGIS STEREOPHONIC CONTROL UNIT  
for correct Stereophonic coupling of two  
Aegis 5/10 Amplifiers. Ask for details.



## Also ask to see the new Stereo Six-88

This latest Stereo Amplifier by Aegis competes more than favourably with higher priced imported units. Performance ratings are most spectacular!

*Now available from Magraths of Melbourne  
and Aegis Agents in other States.*

Manufactured in Australia for Australian conditions by . . .

**AEGIS MANUFACTURING CO. PTY. LTD.**

208 LT. LONSDALE ST., MELB., C.I., VICTORIA. PHONE FB 3731



Registered at G.P.O., Melbourne, for  
transmission by post as a periodical

AMATEUR RADIO

# "HAM" RADIO SUPPLIERS

(KEN MILLBOURN, PROP.)

5A MELVILLE STREET, HAWTHORN, VICTORIA

North Balwyn Tram Passes Corner.

Phone: WM 6465

Money Orders and Postal Notes payable North Hawthorn P.O. Packing Charge on all goods over 10 lbs. in weight, 5/- extra

## SPECIAL PURCHASE!

### AMERICAN RADAR I.F.F. RT24/APX1

44 Valves: 6C4, 6AG5, 6J6, VR150/30, 5Y3GT, 9006, 2D21. 12v. blower motor, 24v. shunt motor, host of resistors, condensers, microswitches, valve sockets, etc. Ideal for wrecking.

Snap this up at £12/10/0

### COMBINATION DRY BATTERY

1.4v. and 90v., 15 inches long, and 1 1/2 inches diameter. 10/-.

### ATR2C TRANSCEIVERS

Portable. Complete with headphones, microphone, a.c. power supply. £5/0/0

### ELECTROLYTIC CONDENSERS

Dubilier 8 uF. and 16 uF., 600v. 5/- each

### SELSYN MOTORS

2 inch English Mk. 1. 48 volt A.C. working. £2/10/0 pair.

### RIGHT ANGLE PLUGS

American Ampenol, 2/6 each.

### APN4 LORAN RECEIVERS

Complete with Valves. Contains: 5U4, VR105, 6H6, 6SA7, 6SL7, 6SN7, 6SJ7, four 6SK7, two 2X2, three 6B4. Ideal for wrecking. Packed in case. £7/10/0

### VALVE SPECIALS!

20 for 20/-: 954.  
12 for 20/-: EF50, 6H6, VT127  
10 for 20/-: 7C7, EA50, 1P5, 955, 6AC7  
8 for 20/-: 6SH7GT  
7 for 20/-: 1C7  
5 for 20/-: 6C4, 6K7G.  
3 for 20/-: 956, 2X2, 12SF7.

### BC966A I.F.F. Top Deck CHASSIS

With Valves: six 6SH7GT's, three 7193s, two 6H6s. Octal Sockets, Resistors, Condensers, 15 x 15 pF. Split-stator Condenser, Relays and Osc. Unit. 30/-.

### RELAYS

522 Type 5,000 ohms ..... £1  
522 Type 2, Aerial Changeover ..... £1

### TYPE "S" POWER SUPPLY

230 Volt A.C. in good condition. £25/0/0

### CATHODE RAY TUBES

7" 7BP7, 10/-, 3" 3BP1, 45/-.

### ACORN VALVE SOCKETS

Ceramic type, 3/6.

### CARBON HAND MIKES

Type No. 3. New. 12/6.

### CALL BOOKS — LOG BOOKS

1959-60 Call Books 6/-; Log Books 4/6.

## CRYSTALS—£2 EACH

20812, 20962.25, 2103.1, 2112.5, 2336.4,  
2410, 2442.5, 2935 Kc.  
3030, 3050, 3055, 3184, 3320, 3432.5, 3450,  
3460.5, 3467.5, 3515, 3540, 3620, 3650,  
3735, 3840, 3885 Kc.  
4035, 4042.5, 4080, 4096, 4130, 4255, 4280,  
4285, 4395, 4398.7, 4451, 4520, 4700,  
4750, 4760, 4765, 4780, 4870, 4875, 4885,  
4930, 4955, 4965 Kc.  
5000, 5095, 5166, 5180, 5245, 5280, 5385,  
5410, 5435, 5471.5, 5480, 5515, 5530, 5535,  
5655.55, 5701, 5706, 5725, 5740, 5744.44,  
5750, 5770, 5773.33, 5775, 5840, 5850,  
5855, 5875, 5897, 5980 Kc.  
6000, 6021, 6100, 6106.67, 6125, 6173,  
6175, 6187, 6225, 6240, 6300, 6305, 6317,  
6333.33, 6373.33, 6400, 6406, 6440, 6480,  
6473, 6497, 6506, 6522, 6525, 6547.9,  
6583, 6690, 6900, 6925 Kc.  
7010, 7015, 7016, 7045, 7055, 7065, 7070,  
7120, 7175, 7191, 7197.1, 7200, 7270, 7275,  
7300, 7350, 7360, 7373.33, 7375, 7400,  
7406, 7425, 7435, 7440, 7487, 7500, 7506,  
7660, 7725, 7750, 7775, 7800, 7825, 7850,  
7875, 7890, 7920, 7925, 7930 Kc.  
8004, 8010, 8175, 8225, 8280, 8290, 8300,  
8392, 8432, 8531, 8625, 8825, 8841 Kc.

## CRYSTALS—30/- EACH

In FT243 Holders. Sockets 2/9 ea.

4295, 4340, 4360, 4375, 4815, 4840, 4852,  
4995, 5205, 5295, 5327.5, 5360, 5397.2,  
5660, 5780, 5782, 5815, 5852.5, 5910,  
5920, 6040, 6210, 6235, 6243.33, 6375,  
6470, 6640, 6700, 6910, 7120, 7270, 7350,  
7450, 8195, 8353.85 Kc.

## CRYSTALS—20/- EACH

In DC11 Holders. Sockets 2/6 ea.

5170, 5410, 5700, 5710, 5810, 5910, 6350,  
6420, 6423.33, 6450, 6561, 6572, 6650,  
6783.33, 6940, 6960, 7010, 7060, 8155,  
8161.53, 8171, 8176.92, 8182, 8264.615,  
8371.428, 8425.714, 8460, 8469.230, 8525,  
8645.454, 8682.857 Kc.

3.5 Mc. Miniature Marker Crystals with socket £2/10/0

5.5 Mc. Marker Crystals with Socket £2/10/0

Crystals, 1898.75, 1985, 1986.25 Kc. 50/-

### SWITCH BOXES

Press Button (6 position). Contains six Bezel Indicators. New. 5/-.

### CO-AXIAL CABLE

100 ohm co-ax. cable, 1/2" diam., 2/- yd.  
98 ohm co-ax. cable, 3/4" diam., in 100 yard rolls £7/10/0, or 1/9 yd.  
50 ohm co-ax. cable, 1/2" diam. Cut to any length. 2/- yd.

## SET OF VALVES FOR COMMAND TRANSMITTER

Two 1625, one 1626, one 1629.  
New in carton. 15/- a Set.

## SET OF VALVES FOR COMMAND RECEIVER

Three 12SK7, one 12K8, one 12SR7,  
one 12A6. New in carton. £1/0/0 a Set.

### SCR522 TRANSCEIVERS

Freq. range: 100 to 150 Mc. Complete with Valves, including 832s.  
As they come—£10/0/0

### RADAR TRANSCEIVERS

RT45/TFX1

American, brand new. Freq. range: 150 Mc. to 190 Mc. Suitable for conversion t.v. field strength meter. 30 Mc. i.f. strip, two r.f. stages. 16 Valves: 955, 966, 6SL7, 6SN7, 2C26, 2X2, 5U4, 6AC7, 6V6, 6H6. Blower motor, split-stator condenser (15 x 15 pF.), connectors, switches, plugs, condensers, and resistors.  
Bargain at £10/0/0

## THREE INCH ROLA SPEAKERS

Type 3C. New. Less Transformer, 15/-.

### MORSE KEYS

Heavy duty P.M.G. Type. New. £1.

### CAR RADIO SUPPRESSORS

Spark Plug Type 2/- each, Distributor Type 2/- each, or 12 for £1.

## MIN. VARIABLE CONDENSERS

Screwdriver adjustment, silver plated. Sizes available: 25, 55, 80, 105, 125 pF. 7/6 each or Three for £1.

## SPECIALS!!

Headphones, Brown's Type "F", low impedance, new £3

Telephone Handsets (American), new £2/5/0

Philips' Capacity Bridge, a.c. operated £15

Loctal Valve Sockets 1/- each

Four-gang Condensers, large, 150 pF. £1

Small Type Phone Jacks 1/6 each

Roblan RMG2 two-gang variable Condensers, 10-24 pF. £1

Two-gang Condensers, b.c. 12/6 ea.

Meters, 0-500 microamp, scaled 0-600v., 122 Type 25/- each

Neon Indicator Globes, 230v. b.c. base 2/6 each

Midget Reinartz Coils 7/6 each

Tuning Knobs, 3" diam. w/skirt, 1" bore 5/- each

Power Transformers, 265v. aside 60 mA., 6.3v., 5v., 4.5v. 39/6

Power Transformers, Abac, 300v. aside 120 mA., 6.3v. 2a., 5v. 2a. £3

# AMATEUR RADIO

JOURNAL OF THE WIRELESS INSTITUTE OF AUSTRALIA

**EDITOR:**

R. W. HIGGINBOTHAM, VK3RN.

**PUBLICATIONS COMMITTEE:**

G. W. BATY, VK3AOM.  
S. T. CLARK, VK3ASC.  
J. C. DUNCAN, VK3VZ.  
J. A. ELTON, VK3ID.  
R. S. FISHER, VK3OM.  
E. C. MANIFOLD, VK3EM.  
J. G. MARSLAND, VK3NY.  
A. ROUDIE, VK3UJ.  
J. VAILE, VK3PZ.

**ADVERTISING REPRESENTATIVE:**

BEATRICE TOUZEAU,  
96 Collins St., Melbourne, C.1.  
Telephone: MF 4505.

**PRINTERS:**

"RICHMOND CHRONICLE,"  
Shakespeare St., Richmond, E.1.  
Telephone: JB 2419.

MSS. and Magazine Correspondence should be forwarded to the Editor, P.O. BOX 36, EAST MELBOURNE, C.2, VIC., on or before the 8th of each month.

Subscription rate, in Australia and Overseas, is 24/- per annum, in advance (post paid).

Wireless Institute of Australia (Victorian Division) Rooms' Phone Number is JA 3535.

**WI BROADCASTS**

All Amateurs are urged to keep these frequencies clear during, and for a period of 15 minutes after, the official Broadcasts.

VK3WI: Sundays, 1100 hours EST, simultaneously on 3575 Kc., 7146 Kc., and 145.0 Mc. Intrastate call-backs taken on 7050 Kc..

VK3WI: Sundays, 1030 hours EST, simultaneously on 3575 and 7146 Kc., 51.016 and 146.25 Mc. Intrastate hook-ups taken on 7125 Kc. Individual frequency checks of Amateur Stations given when VK3WI is on the air.

VK3WI: Sundays, 0900 hours EST, simultaneously on 7146 Kc. and 14.342 Mc. Intrastate hook-ups taken on 7105 Kc.

VK3WI: Sundays, 0900 hours CAT, on 7146 Kc. Intrastate hook-ups taken on 7125 Kc. Frequency checks given when VK3WI is on the air and also by VK3MD by arrangement.

VK3WI: Sundays at 0930 hours WAST, on 7145 Kc. Intrastate hook-ups taken on 7085 Kc.

VK3WI: Sundays at 1000 hours EST, on 7146 Kc. and 3575 Kc. Intrastate hook-ups taken on 7115 Kc.

Published by the Wireless Institute of Australia, Victorian Division,  
478 Victoria Parade, East Melbourne, C.2.  
Postal Address: P.O. Box 36, East Melbourne, C.2, Vic.

**EDITORIAL****The Geneva 1959 I.T.U. Conference**

The 1959 Administrative Radiocommunications Union, which completed its discussions and resolutions at its final Plenary Conference in Geneva during last December, will rank amongst the greatest of conferences convened to provide a workable system on an engineering basis for the communications services of the world; services which, during the last decade, have expanded beyond the expectation of most countries.

Elsewhere in this issue you will find the final report from John Moyle, VK2JU, who attended the Conference as the accredited W.I.A. representative with the official Australian Delegation.

Although once again the outcome of an international conference of nature has resulted in further reductions in the frequency allocations of the Amateur Service—particularly in Region III.—it is certain that the position would have been far more disastrous had it not been for the powerful Amateur representation at the Conference who jointly made certain that the Amateur Service received a just hearing along with the complicated problems of all the other communication services throughout the world.

Our own representative, John Moyle, has been highly praised for the part he took in "fighting" for the rights of the Amateur against pressure which can only be really understood by those who were pres-

ent at the Conference. John Moyle did not spare himself in defence of the Amateur cause despite the fact that he was, even at that time, ailing with an illness from which it is now doubtful he will recover. Probably no greater tribute could be spoken of the work he did for and on behalf of the Amateur Service than the words of Mr. Prose Walker, Manager of Engineering of the National Association of Broadcasters of the United States of America, which appear in the correspondence columns of this issue of "Amateur Radio."

That the Wireless Institute of Australia was justified in making it possible to send a representative to this mammoth conference is beyond dispute; that we were able to send a man of the calibre of John Moyle is something for which the present and future generations of Australian Amateurs should be forever grateful. With a selfish disregard for his own personal health, John Moyle carried out his assignment on behalf of the Australian Amateur in a manner which can only leave us all feeling peculiarly humble. Even when he returned and underwent a most serious operation, his tenacity of purpose and never-ending interest in Amateur Radio drove him, under extremely uncomfortable circumstances, to write his final report to you . . . the Amateurs of Australia.

We shall never forget what John Moyle has done for the Amateur Service.

FEDERAL EXECUTIVE.

**THE CONTENTS**

Sideband Reception without Tears	2	Operation Tokelau—ZM7DA	16
Tunable I.F. Receiver using the BC453	3	Prediction Chart, March '60	17
1959 VK-ZL DX Contest Results	8	DX	19
Results of Geneva 1959 I.T.U. Conference	11	SWL	20
N.S.W. 10th Annual Convention at Dural, 30/1/60	14	VHF	21
		Correspondence	22
		Amateur Call Signs	23
		Notes	24



## Sideband Reception Without Tears

LINDSAY DOUGLAS,\* VK2ON

Can you receive sideband so that it sounds like a.m.?

Can you resolve the "duck talk" with an ordinary receiver?

Can you overcome the critical tuning of a sideband signal?

The gadget to be described will, in the writer's opinion, make up for the deficiencies of your ordinary receiver when resolving a good single sideband signal. Should reception of double sideband be required, additional selectivity is needed as provided by a Q multiplier.

The device is a very stable oscillator or frequency meter operating from 1.75 to 1.9 Mc. In operation the sideband station is tuned in roughly using the b.i.o. of the receiver, then the front-end injector is switched on and adjusted for zero-beat. The b.i.o. is now switched off. The a.v.c. on the receiver can be left on and the attenuator adjusted so that there are no S meter variations during modulation. Perfect a.m. quality should result with any good s.s.b. signals. This home-brew front-end injector has been in use at the writer's station for nearly a year and has given complete satisfaction. Its stability is many times greater than that of the normal receiver. A BC342.

## CONSTRUCTIONAL DETAILS

The old work-horse, a Command transmitter, frequency range 4.0 to 5.3, is converted and padded to the low frequency of 1.75 to 1.9 Mc.

The relays, roller inductor, tank coil, and unessential wiring of the Command transmitter are removed. Parts remaining are the variable condensers and the shielded coil. The two ganged condensers are connected in parallel. The 6AM6 miniature 7-pin valve socket is mounted on a small bracket, preferably aluminium, behind the front panel and above the chassis. In this way any heat generated is kept as far as possible from the other components. No doubt any other high-GM valve could be used in place of the 6AM6, such as 6BX6 or 6AC7.

The fixed condensers (0.0014, 0.008, and 0.005  $\mu\text{F}$ .) should be of the silvered mica type, especially the 0.0014  $\mu\text{F}$ . These can be obtained but may not be especially ordered. For temperature compensation, a negative  $\alpha$ -coefficient 100 pF. is used shunting the 0.0014  $\mu\text{F}$ . 200 pF. gives over-correction, then a suitable value of silvered mica condenser such as 500 pF. is inserted at "X" and the difference re-applied across the 0.0014  $\mu\text{F}$ . The powdered-iron slug of the Command transmitter allows the lining up of 4.0 on the dial with the 3.5 Mc. second harmonic, then the dial reading of 5.3 should be about 3.82 Mc.

Temperature compensation can be fairly quickly reached by taking a reading against a crystal frequency, then wrapping the injector, with a

thermometer, in newspaper and placing in the refrigerator for 45 minutes. This should reduce its temperature to 45 to 50 degrees F., sufficient to take a further dial reading against the crystal. When suitably compensated, it will be found that the compensation is slightly insufficient at 4.0 and slightly in excess at 5.3 dial readings. Compensation is only required against changes in room temperature as the oscillator generates so little heat.

As a precaution, a small hole, valve-socket size, is cut directly above the 6AM6 to allow ventilation. A thermometer placed above the 1625 sockets showed no registerable heat transfer from the 6AM6 oscillator. You will see that the Command transmitter case is well supplied with louvres.

Note carefully two things about the plate load:

- (1) One of the two r.f. chokes is slug-tuned (roughly) to 14 Mc. to boost this harmonic.
- (2) A 25,000 ohm resistor shunts the r.f. choke chain. This is essential in order to prevent frequency drift when the output attenuator is varied.

to begin oscillation over the region 3.75-3.82 Mc., after switching on. Oscillation began readily on touching the grid with a lead pencil—accordingly a stiff wire from the grid was extended to a small hole in the front panel for a little pencil stimulation if required. The difficulty is to arrange for ready oscillation at the high frequency end, yet to avoid squeezing at the low frequency end. This is only a minor defect however.

The oscillator is not very microphonic or sensitive to pressure on the aluminium box, because of the large capacity employed. A 50 pF. condenser in the grid lead was tried and discarded. It worked much better without this.

You will notice a five plate trimmer connected across the 0.005  $\mu\text{F}$ . capacitor. This is for fine adjustment of frequency. It allows one to get "spot-on" with resulting a.m. quality. Various 0.01  $\mu\text{F}$ . by-pass capacitors have been included to prevent direct pick-up via the receiver power supply. Power is obtained from the receiver power supply with the 150 volts regulated.

The circuit of the front-end injector is a modification of a v.f.o. appearing in an article by W4ELZ in "QST," October 1957.




Fig. 1.—Front-end Injector/Frequency Meter.  
L1—Adjust slug so 4.0 on dial equals 3.5 Mc.  
L2—Tune slug to 14 Mc.  
Valve type—6AM6.  
Value of the output attenuator is 20K.  
Note 1.—Place 0.008 and 0.005  $\mu$ F. fixed condensers at rear below chassis.

The output terminal is connected to the antenna terminal of the receiver. If signal cannot be sufficiently attenuated, the insulated wire can be wrapped around terminal to give capacity coupling.

This instrument, after calibration, may be used as a frequency meter of very useful accuracy as it becomes stable 25 seconds after switching on. It is also handy as a marker to indicate where a station will re-appear.

Should the front-end injection be not quite sufficient to avoid overmodulation effects (as for strong night signals on 7 Mc.), the receiver-antenna switch can be opened.

One peculiarity the writer has not been able to eliminate is its reluctance

## SUBSCRIPTIONS

● Please pay your Subscriptions PROMPTLY when due. Failure to do so may result in the loss of valuable issues of "Amateur Radio." High costs of production make it necessary to limit the number of extra copies printed each month.

**Wireless Institute of Australia  
Victorian Division**

### A.O.C.P. CLASS

commences

THURSDAY, 28th APRIL, '60

Theory is held on Monday evenings, and Morse and Regulations on Thursday evenings from 8 to 10 p.m.

Persons desirous of being enrolled should communicate with—  
Secretary W.I.A., Victorian Division,  
P.O. Box 36, East Melbourne  
(Phone: JA 3535, 10 a.m. to 4 p.m.), or the Class Manager on either of the above evenings.



# Tunable-I.F. Receiver using the BC453\*

Up-Dated Surplus Receiver in an Inexpensive Assembly  
Meeting Modern Standards of Performance

CARL H. ERICSON, W2PPL

• These notes on the "HBR-453," as the author calls the receiver, are intended principally to suggest ideas, encourage experimentation, and inspire others to delve a bit into receiver construction. The set-up described here differs in many ways from previously published schemes, and although you can take the circuit as a "final final" product for copying, the ARC5 receivers still offer plenty of scope for the ingenious builder.

of the HBR-453, on any band, is that inherent in the Command Set itself. Although no noise figures were taken, in this average location antenna noise greatly exceeds receiver noise on 15 metres. One band switch changes coils in the front-end. A separate switch is used for the crystals. Only the mixer circuit was broadbanded, since the antenna trimmer tunes the r.f. stage. A 6BE6 was originally used as a converter but this was changed to a 6BE6-6AB4 combination at a later stage of development, to reduce mixer noise and to obtain more reliable oscillation with the higher-frequency crystals.

Kc. from the desired signal, could not be brought down to a satisfactory level.

Finally the Rubicon was crossed and the coils that came with the 453 were gradually unwound and tried repeatedly until a balance between front-end images and internal images was reached in the vicinity of 1000 Kc. The tuning range was made 1000 to 1300 Kc. with the variable oscillator in the 453 being 85 Kc. lower in frequency (it was formerly higher in frequency than the received signal). This move to the low side of the signal was made in the interests of thermal stability, but it is possible that it contributed to some of the difficulty that was encountered later in tracking. The oscillator was not tried on the high side.

The final choice of frequencies resulted in image ratios in excess of 40 db., which is the limit of our ability to measure accurately; the ratio actually may be somewhat better than this. These measurements were taken with a transmitting antenna, tuned to the band in use, on the receiver; and that is certainly recommended operation for any station. In terms of actual listening tests 40 db. means that very few images will be heard, and those that do get through will be weak compared with the desired signal. (These are

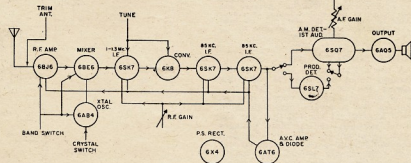


Fig. 1—Block diagram of the receiver. The 1-1.3-Mc. tunable i.f. is a revamped BC-453 receiver.

## REVAMPING THE 453 TUNING RANGE

The front-end of the BC453, which is the tunable i.f., was the area in which most difficulty was encountered. Realising, from the experience of others with images, that the front-end had to be moved to a higher frequency, this was first attempted by pulling the slugs from the 453 coils. This increased the frequency not more than 500 Kc. on the high end and even less on the low end. Next, a set of Ferri-loopsticks was obtained and trimmed down for operation in the 1800-2100 Kc. range, a very nice place for the tunable i.f. so far as front-end images were concerned. This attempt failed because images in the tunable section, removed twice 85


pre-inflation decibels, not to be confused with the type that come nowadays over 9 on the S meter.) All tests were made on 15 metres.

## REAR-END CHANGES

The 85 Kc. i.f. strip of the 453 was used unchanged except for the a.v.c. and manual gain control circuits. However, beyond the second 6SK7 i.f. stage the 453 was completely re-built. Low audio gain made necessary the addition of a 6SQ7 first-audio stage, and a 6AQ5 was substituted for the original output tube to save room. The diode in the 6SQ7 was retained for a.m. detection and a 6SL7 was added as a dual-triode product detector. This circuit, used in some of the better commercial receiv-

THE BC453 Command Set has enjoyed a long and varied career in Amateur Radio circles; its popularity is justly deserved. These units have been used as s.s.b. generators, panadaptors, the very famous Q5-er, and as parts of many receivers. The principal reasons why the 453 has found so much use are its small size, high gain and low cost, but perhaps the most valuable assets are the stable front-end and sharp intermediate-frequency system.

The presence of a 453 on the shelf here for many years has offered a constant challenge to see what could be done with it in the way of making an all-band Amateur receiver. There have been numerous articles on using a 453 as a tunable i.f. following a fixed-frequency front-end for 80 and 40, but usually 7 Mc. was the recommended upper frequency because of image limitations with the 200 to 500 Kc. i.f. that was used.



The i.f. section of the 453 remains largely intact, with the new tubes in the rear-end section being installed on the afterdeck formerly occupied by the dynamotor mounts. The power supply is on a vertical sub-chassis at the rear, with the transformer mounted outboard to reduce internal heating.

Before starting this project some rough specifications were formulated, one being that the receiver should work on all bands except 10. Ten metres was not desired because of operating-time limitations. Additionally, the receiver should be small in size and self-contained—even including a small speaker for portable use; it should be stable enough for s.s.b. reception and also good on c.w. or a.m.; it should be sensitive and selective—in general, it should be a pretty decent performer.

These notes on the "HBR-453," if one may crib a name from Ted Crosby,<sup>2</sup> are an account of my experience in this endeavor.

Fig. 1 is a block diagram of the end result. The crystal-controlled front-end accounts for the fact that the stability


\* Reprinted from "QST," September 1959.

1 For example, Steward, "A Crystal-Controlled Plug-in Converter for the Q5-er," "QST," October 1949.

2 Crosby, "Ham-Band 14-Tube Double-Conversion Receiver," "QST," July 1957.

ers, gives very good performance on s.s.b. and c.w. The voltage available for a.v.c. with a diode alone at the second i.f. stage was insufficient to give the type of a.v.c. action desired, so the 6AT6 was added as an a.v.c. amplifier-rectifier. The amplifier is RC coupled, and as such gives plenty of gain at 85 Kc.

It was necessary to move the b.f.o. to the rear of the chassis to prevent stray coupling into the i.f. amplifier. Once it was moved to the rear the only precaution necessary was the use of a shielded lead to the product detector, and a tube shield. One half of a 12AT7 was used for the b.f.o.; the other half is currently unused but some day may see service as a 100 Kc. oscillator or the like. Since the 85 Kc. i.f. will not pass both sidebands, it was necessary to switch sidebands by shifting the b.f.o. from 700 cycles above to 700 cycles below the 85 Kc. i.f. pass-band. The error this throws in the dial calibration is negligible.



Disguised by a new panel, and installed in a modified tuning-unit cover from a BC375, the BC453 which is the heart of this receiver is used as a tunable i.f. after a crystal-controlled four-band converter. The tuning range has been raised in frequency in order to reduce image response, and the rear end has been thoroughly revamped to moderate the performance.

## POWER SUPPLY

A small transformer capable of delivering about 100 mA. at 230 volts powers the receiver. The RC filter, which also doubles as a voltage divider, renders the receiver completely hum free. Experiment showed that the 453 would perform well at plate voltages down to about 40 volts, but the gain rose rapidly up to 100 volts or so and then more slowly beyond that point. To keep down heating, and thus reduce drift, the 453 runs at 100 volts and the 6BJ6, 6BE6 and 6AQ5 are run at 130 volts for noise and distortion considerations. Voltage regulation wasn't required.

## CONSTRUCTION POINTERS

It would be nice to be able to say that this receiver was put together over a week-end and it worked perfectly the first time, but that isn't so. It was put together over several months, and most of the time it didn't work well, if at all, until the end of the struggle drew near. This is not a step-by-step conversion piece, so anyone intending to construct a similar receiver should have some previous experience along these lines. Access to a signal generator, v.t.v.m., and a grid-dip

meter is also desirable, and a circuit diagram for the BC453 is most essential. Aside from the foregoing we can only recommend a small measure of perseverance.

Numerous articles on the BC453 cover what one may expect to encounter upon digging into its vitals. These are recommended reading if one is not familiar with the unit. It was an easy piece of surplus to work on, as surplus goes. To get the 453 ready for conversion it was stripped of its top shields, antenna terminal, dial, and the mounts and socket for the dynamotor. The antenna trimmer capacitor, the rear socket and the front plug-in box were also removed. With the exception of the tube sockets, all of the receiver beyond the last i.f. transformer was removed, including the entire b.f.o. and all of the filament and high voltage filters. These filters are L14, L15, C32, C12 and C15 in the original circuit. R22 and R23 were left in to supply screen voltage. The neon bulbs were removed. A number of the capacitor cans along the side of the chassis were removed and replaced with small modern capacitors of the same electrical ratings. This was done only to gain some work-

ing space, and is a matter for the discretion of the builder.<sup>3</sup>

The filaments were rewired in parallel for six-volt tubes. The holes left by each of the four dynamotor mounts were enlarged to take sockets for the new tubes that were added to the rear end of the receiver, and the b.f.o. transformer was mounted in the socket hole in the middle of these four.

Although such an arrangement need not be copied, the new tube layout is as follows: The 6SQ7 goes into the 12SR7 socket, the 6SL7 into the 12A6 socket and, when viewed from the top front, the tube at the left rear is the 6AQ5, the one at the right rear is the 12AT7, and the one at the right front is the 6AT6.

A 2 inch sub-chassis was added to the bottom of the 453 in order to get more front panel space for controls. Although this receiver could have been made even smaller than it was, a future builder might do well to think in terms of a larger unit if greater ease in construction is to be desired. The front end was built on a separate sub-

<sup>3</sup> Another reason for the replacement of these capacitors is that most show signs of leakage with age.—Editor.

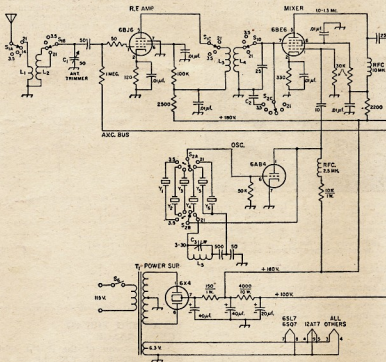


Fig. 2.—Circuit diagram of the receiver. The section shown on this page is built on sub-chassis as described in the text. Section on opposite page is on the BC453 chassis. Unless indicated otherwise, capacitances are in pF., resistances in ohms, resistors are  $\frac{1}{2}$  watt. Fixed capacitors of 0.01  $\mu$ F. are disk ceramic; capacitors with polarity indicated are electrolytic; others may be mica or ceramic.

C1—50 pF. midget variable.

C2—5 pF. ceramic (see text).

C3, C4, C5—Mica trimmers.

L1—L4 inclusive—See Table.

L5—7 turns No. 26 enamel, close wound on  $\frac{1}{4}$  inch form.

L6—20 henry choke; any low current type is satisfactory.

LS1—Midget speaker, 3.2 ohm voice coil.

R1—0.5 megohm control, audio taper.

R2—3,000 ohm wire wound control, screw-driver adjustment.

S1—Phenolic rotary; 4 poles, 4 positions used, 3 sections.

S2—Ceramic rotary; 3 poles, 6 positions used, 3 sections.

S3—Rotary; 3 poles, 2 positions, 1 section.

S4, S5—Rotary, 1 pole, 2 positions.

S6—5 p.p.s., on R1.

T1—Power transformer, 230 volts each side c.t., 100 mA.; 6.3 volts, 5 amp.

T2—Output transformer, 1,000 ohms to 3.2 ohm voice coil.

Y1 to Y8 inclusive—See Table.

assembly; so also was the power supply, which hangs mainly on the rear panel. The power transformer was mounted on the outside of the rear panel to keep its heat out of the set.

An aluminium front panel was spaced 1/4 inch off the front of the 453. A steel wire pointer, painted dull black, was fastened under the old dial nut, thus retaining the smooth dial drive that came with the Command set. The front of the 453 was painted with two coats of satin-finish white enamel and calibrated with India ink. Control nomenclature was lettered directly on the aluminium panel with a Leroy lettering set and India ink after the panel was etched with caustic. The final product was given two coats of clear lacquer.

### 453 CIRCUIT CHANGES

Work on the tunable portion of the 453 consists only of making it tune and track over the new tuning range. To facilitate work the common yoke between the coil cans was removed. This yoke grounds the shield cans, so once it is removed the cans have to be individually grounded. On the r.f. and




Fig. 3—Changes in BC453 front end to cover 1-1.3 Mc. tuning range. Designations in parenthesis are the same as in the BC453 original circuit diagram. See text for data on changes in tuned circuit coils.

ough to produce a gain uniform to about two d.b. was as good as could be obtained. It is adequate. Fig. 3 shows the trimmer and padder capacitors added to the circuits.

Fig. 4 shows the manual gain control circuit, which was in accordance with the original circuit diagram except that R12 was reconnected to include the second i.f. stage in the control. Before this was done the gain of the receiver couldn't be reduced sufficiently to monitor the home station transmitter.

Fig. 5 shows the changes made to incorporate a.v.c. in the 453 and to apply it to the 6BJ6. While on this

cause appears to be regeneration in the i.f. stages, which can easily be eliminated by installing decoupling networks consisting of 200 ohm resistors and 0.05 μF. capacitors at the screens of the 6SK7s. Once this was done the 85 Kc. i.f. strip couldn't be peaked up to the ringing selectivity it had displayed previously, so an inveterate c.w. man might not think this step desirable. The i.f. stages could be aligned to give something in the order of 1500 cycles at 6 db. down, which was a little too sharp for good phone reception, so they were slightly staggered to give a bandpass of about 2500 cycles. Switching of the transformers was tried in an effort to obtain variable bandpass, but it was too necessary to switch at least two transformers—four circuits—to get adequate control, so the idea was abandoned.


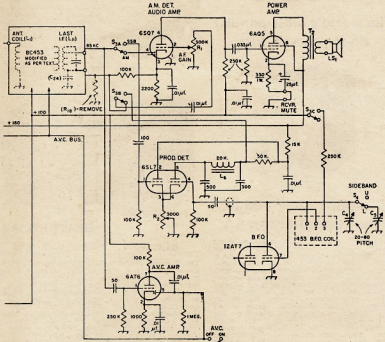


Fig. 4—These changes in the BC453 add a manual gain control and apply it to the last i.f. stage in addition to the r.f. and first i.f. stages. Designations in parenthesis refer to original BC453 circuit diagram.

### PRODUCT DETECTOR

The 6SL7 product detector was chosen because good results had previously been obtained with this circuit. This dual-triode demodulator gives about the same gain (loss) as the diode detector in the a.m. position, which is considerably better than some of the other circuits will do. The only adjustment required in the product detector was setting the cathode balancing resistor. This was set by switching to s.s.b. and pulling the b.f.o. tube out of its socket. The resistor was then adjusted while listening to an a.m. station. Over most of the range of this resistor the a.m. will be very readable but at one critical setting it will become so distorted as to be unreadable. That is the point. This point was found to hold unless the tube was changed for one of different characteristics, or unless the voltage on the tube changed by quite a large percentage.

On a.m. it was found that the 2500 cycle bandpass was inclined to make the signals sound quite bassy. On a stable signal this condition can be alleviated by switching to s.s.b. and using the b.f.o. as a substitute for the a.m. carrier. It did not seem prudent to widen the

mixer coils there was a ground pin available, but on the oscillator there was none so this can was grounded with a lug. The coils were altered by removing the following numbers of turns, in every instance from the hot end:

- L1—110 turns.
- L2—50 "
- L3—125 "
- L4—50 "
- L5—90 "

The slugs were used in the r.f. and mixer coils and were helpful in tracking. The slug was not used in the oscillator coil. Tracking accurate en-

subject of a.v.c. for c.w. and s.s.b., the discerning may note that this receiver has only 0.05 μF. on its a.v.c. bus, making it a fast-attack, fast-decay system. The writer has, in the past, modified a number of a.v.c. systems and built up more from scratch for use on s.s.b. No matter how one compromises their design, in my opinion they all still fall short in one respect or another. This a.v.c. is no worse than some of the "ultimate" systems I have tried.

The basic 453 seemed to be very noisy when the gain control was well advanced. This same characteristic has been observed in a few Q5-ers. The



## The WARBURTON FRANKI Page



**HEATHKIT TX-1**

### "APACHE" HAM XMITTER KIT

Emphasising high quality, this rig operates with a 150 watt phone input and 180 watt c.w. input. In addition to c.w. and phone operation, built-in switch selected circuitry provides for single sideband transmission through the use of a plug-in external adaptor. A completely re-designed and stable v.f.o. provides low drift frequency control necessary for s.s.b. transmission. A slide-rule type illuminated rotating v.f.o. dial with full gear drive vernier tuning provides ample bandwidth and precise frequency settings. The band switch allows quick selection of the Amateur bands on 80, 40, 20, 15 and 10 metres (11 metres with crystal control). This unit also has adjustable low-level speech clipping and a low distortion modulator stage employing two of the new 6CA7/EL34 tubes in push-pull class AB operation. Time sequence keying is provided for "chirpless" break-in c.w. operation. Final amplifier is completely shielded for greater t.v.i. protection and transmitter stability.

Price: £234 plus S.T.



**HEATHKIT RX-1**

### "MOHAWK" HAM RECEIVER KIT

Enjoy Ham activities to their fullest with the Heathkit "Mohawk" Ham band receiver which has all the functions required in high quality communications for clear, rock-steady reception on all bands. This 15-tube receiver features double conversion with i.f.s. at 1625 kc. and 50 kc. and covers all of the Amateur frequencies from 160 through 10 metres on seven bands with an extra band calibrated to cover 6 and 2 metres using a converter. Receiver accommodations are provided for these converters which will be available in Heathkits soon. The "Mohawk" is specially designed for single sideband reception with crystal controlled oscillators for upper and lower sideband selection. Completely pre-assembled, wired and aligned front-end coil assembly assures ease of construction and top performance of finished unit.

Price: £248 plus S.T.




## CUT EQUIPMENT COSTS IN HALF

with simple-to-build

# HEATHKITS


The world's most popular do-it-yourself kits



**HEATHKIT SB-10, SINGLE  
SIDEAD ADAPTOR KIT**

The many advantages of single sideband transmission will be of interest to Hams now operating strictly a.m. or c.w. S.s.b. requires less spectrum space, interference and fading are reduced, and signal strength is increased without greater power output. Designed as a compatible plug-in adaptor for the TX-1, it can also be used with transmitters similar to the DX-100 or DX-100B by making a few simple circuit modifications while still retaining the normal a.m. and c.w. functions. This modification will also be available soon in kit form. Extremely simple to operate and tune, the adaptor employs the phasing method for generating a single sideband signal, thus allowing operation entirely on fundamental frequencies. The critical audio phase shift network is supplied completely preassembled & wired in sealed plug-in unit.

Price: £85 plus S.T.



**HEATHKIT DX-100B**

### TRANSMITTER KIT

The model DX-100B is a completely bandswitching rig for phone or c.w. operation on 160, 80, 40, 20, 15, 11 and 10 metres. It has a built-in v.f.o. or may be excited from crystals. Crystal sockets are built in. The easy-to-build kit contains all parts necessary for construction, including tubes, cabinet, hardware, etc. The detailed step-by-step instruction manual features plenty of pictorial diagrams for easy assembly. PI network output coupling allows matching non-inductive loads from 50 to 600 ohms, and is only one of the design features of this outstanding performer. Assembly is subdivided into several stages. This allows the construction to proceed smoothly from one section of the transmitter to another. Sub-units are assembled and then added to the complete chassis. The chassis is extra strong 16 gauge copper-plated steel. Construction is further simplified by use of a pre-formed wiring harness, pre-formed coils, etc.

Price: £190 plus S.T.



**HEATHKIT AR-3**

### ALL-BAND RECEIVER KIT

The Heathkit model AR-3 receiver features proven circuit design and physical layout. The net result is good sensitivity and selectivity, coupled with more flexible overall operation. Performance of the AR-3 is really outstanding, especially in view of its low kit price. High Q slug-tuned coils are used in the front-end and an antenna trimmer has been added so that the front-end may be peaked to a particular signal on any of the bands. The coil layout permits easy alignment from above the chassis. Predesigned oscillator coils result in increased conversion transconductance through the mixer circuit, and new-type i.f. transformers allow a better band pass curve, and more gain. The tuning capacitor is shock mounted, and the overall layout eliminates ground loops, shortens important lead lengths, and makes for easy assembly.

Price: £31/15/- plus S.T.



# WARBURTON FRANKI

VIC.: 359 LONSDALE ST., MELB. 67-8351 • N.S.W.: KENT ST., SYDNEY. BX 1111  
QLD.: 233 ELIZABETH ST., BRISBANE. 31-2081

i.f. just to make unstable signals sound better.

Quite a bit of 85 Kc. signal will go through the product detector and appear at the grid of the first audio stage unless it is filtered out. Filtering at 85 Kc. takes quite a large inductance to be effective as an r.f. choke, so it was decided instead to put in an audio filter using an iron-core inductance. By doing this, it was possible to start cutting off at about 3000 cycles and thereby eliminate some of the hash that adds nothing to communication.

The isolation of the b.f.o. was tested by switching to the a.m. position and powering the b.f.o. with a jumper. In addition to the shielded lead to the 6SN7 it was found necessary to shield the 12AT7 in order to remove all trace of beat signal.

At about this stage of the game one discovers he has a pretty hot broadcast receiver on his hands. In this metropolitan area, with powerful broadcast stations nearby, there was not a trace of these broadcast stations coming through after the receiver was installed in its shielded cabinet.

## FRONT END

After the problems with the conversion of the 453 were licked, the front end went together quite uneventfully. Aside from running a metal shield between the input and output sections of the 6BJ6 circuit, no special precautions were taken; nevertheless, the stage proved stable from the start.

The addition of the 6AB4 was a big improvement and its omission would be discouraged. It may be noted that the oscillator switches from fundamental to overtone operation on 21 Mc. C3 is a 3-30 mica trimmer, and L5 is 7 turns of No. 24 on a  $\frac{1}{2}$  inch diameter form. If it is desired to use an overtone crystal on 14 Mc. another coil-capacitor combination will be required and the coil should have about 10 turns.

The mixer grid circuits are peaked up for the centre of each band except in the case of the 80 metre coil. The 80 metre circuit is peaked at the centre of the 3.7-4 Mc. range with S2 on the proper contact for this range. Switching S2 to the 3.5-3.7 Mc. range cuts in C2, which should be selected to peak the mixer at about 3600 Kc. without changing the position of the slug in L4.

## PERFORMANCE—AND SOME SPECULATIONS

Now that the receiver is about completed one might logically ask if it meets the specifications. It is small, being 8 x 8 x 12 inches, and is very

rugged. It contains power supply and speaker—although it is true that it sounds better on a larger speaker. Stability proved to be far in excess of expectations—possibly due to some fortunate circumstance—and certainly is a tribute to the design of the BC453. On 21 Mc., from a cold filament start, the drift has been measured at less than 300 cycles in the first 30 seconds, and less than 60 cycles from there on out.

## COIL AND CRYSTAL DATA

### 3.5 Mc.:

- L1—30 turns No. 26 on  $\frac{3}{8}$ " diam. form.
- L2—80 turns same as L1, wound close to L1.
- L3—90 turns No. 32 on  $\frac{1}{4}$ " diam. slug-tuned form.
- L4—120 turns same as L3, wound close to L3.
- Y1—4.8 Mc., for 3.5-3.8 Mc.
- Y2—5.0 Mc., for 3.7-4.0 Mc.

### 7 Mc.:

- L1—18 turns No. 26 on  $\frac{3}{8}$ " diam. form.
- L2—45 turns same as L1, wound close to L1.
- L3—90 turns No. 32 on  $\frac{1}{4}$ " diam. slug-tuned form.
- L4—65 turns same as L3, wound close to L3.
- Y3—8.3 Mc.

### 14 Mc.:

- L1—5 turns No. 26 wound over L2.
- L2—18 turns No. 24, 32 turns per inch,  $\frac{1}{4}$ " diam.
- L3—25 turns No. 32 on  $\frac{1}{4}$ " diam. slug-tuned form.
- L4—35 turns same as L3, wound close to L3.
- Y4—15.3 Mc.


### 21 Mc.:

- L1—Use L1 for 14 Mc.
- L2—Use tap at 13th turn from bottom on L2 for 14 Mc.
- L3—15 turns No. 26 on  $\frac{1}{4}$ " diam. slug-tuned form.
- L4—20 turns same as L3, wound close to L3.
- Y5—22.3 Mc., overtone type, for 21.0-21.5 Mc. range.
- Y6—22.5 Mc., overtone type, for 21.2-21.5 Mc. range.

Coils on  $\frac{1}{4}$ " and  $\frac{3}{8}$ " diameter forms are multi-layer (scramble-wound), approximately  $\frac{1}{4}$ " in width; separation between coils wound on same form is about  $\frac{1}{16}$ ". Wire insulation is enamel. Adjust to resonate, with capacitances given in Fig. 2, to band for which wound.

The mechanical stability of the unit was implied earlier. I have repeatedly worked on the receiver while listening to an s.s.b. QSO and decided, say, to change a component in the audio circuit. The line cord would be pulled, the receiver up-ended and the part changed, then the cord plugged in again and the set returned to normal position—to find the s.s.b. QSO still in tune. The receiver is sensitive, has plenty of gain, and has a low noise level. The image rejection is a little poorer than was hoped for.

Having trod this ground once, would I come this way again? Probably not. If it is my "misfortune" to get another BC453 I think I would leave the 453 on 200 to 500 Kc., convert to 3500-3800 Kc. and 3700-4000 Kc. for 80, and convert to 3700-4000 Kc. for the higher bands, using triple conversion. Some preliminary tests made along this line indicate the need for an r.f. amplifier at the intermediate 3700-4000 frequency when working on the higher bands. Spurious responses should not be a problem except for one fifth harmonic that shows up at 21250 Kc., the injection frequency being 3.7-4 Mc. lower than the signal in every case.



The crystal-controlled converter is on a sub-chassis installed at the left front of the assembly. The three-deck switch at the bottom is for the converter oscillator crystals; the band switch for the r.f. and mixer tuned circuits is near the centre and the tubes are at the top. Power supply components are on the rear panel or sub-chassis.

One other idea that seems interesting is the use of a higher-frequency Command set, perhaps the one that tunes the 80 metre band. These units have the curse of a higher-frequency intermediate frequency amplifier that is quite broad, but they might respond to a cascaded half-lattice filter. In either case the tail end of the receiver described here would be pretty much duplicated. General coverage, rather than Amateur band only, tuning in the crystal converter section would be a worthwhile asset, in that it would allow any 300 Kc. segment of the entire spectrum to be covered by plugging in a suitable crystal.

A close inspection of the front panel will reveal a control marked noise limiter (NL). Since the type to be used has not been decided on as yet, that is just a provision for the future. Ah! Then the HBR-453 is not completely finished? No, and it never will be—not as long as new ideas continue to flash up on the horizon—wonderful ideas, that can be tried, incorporated or abandoned!




Fig. 5.—Circuit changes in the BC453 to introduce a.v.c. voltage from the added a.v.c. amplifier (6AT6). This drawing also shows the a.v.c. voltage applied to the 6BJ6 r.f. amplifier in the external converter.

# 1959 VK-ZL DX CONTEST RESULTS

## COMMENTS

First impressions suggested that poor DX conditions contributed largely to the small number of logs received in this year's VK-ZL DX Contest. However, upon perusal of some of the comments from overseas stations, it would appear that lack of support from VK and ZL stations was a major factor in the small number of entries received.

Since this Contest was inaugurated, as a VK-ZL Contest, in 1935, it has gained tremendous popularity among overseas countries and several of their prominent DX men claim it as the best contest of the year.

It would be a great pity to see this popular DX Contest lapse into the mediocre class for the want of support from the Amateurs of the sponsoring countries—VK and ZL.

Without going into a long involved "Pep Talk," the Contest Committee urges the DX men of VK and ZL to keep this Contest alive and show our overseas friends that we can put on a good show and support it with plenty of stations to work.

Unfortunately, the C.w. Section week-end clashed with a W.A.D.M. "behind the curtain" contest, resulting in severe QRM in the European area. This was most regrettable and calls for a closer investigation and co-ordination of contest dates on an I.A.R.U. level.

In the C.w. Section, last year's outright winner was VK2ADE by a narrow margin from ZL1AH, but this year, ZL1AH has topped his old rival by a comfortable margin with a score of 14,455 points. VK2ADE was second with 11,150 points, and ZL4GA with 10,755 narrowly defeating VK2GW (10,705 points) for third placing. Congratulations are extended to these stalwarts of the Contest for their magnificent scoring.

The winner of the Phone Section was VK5MS with a score of 8,050 points, all obtained on 14 Mc! This effort deserves special commendation and congratulations.

In New Zealand the highest phone score was made by ZL1ACI with 4,875 points, again a fine single-band effort, made on 21 Mc.

The best scores from overseas stations in the C.w. Section were made by U.S.A. Amateurs. The leading stations were: W6GHH, 3095; W6IBD, 2,665; and W6KG, 2,340.

In the Phone Section, 9M2DQ takes the honors with a score of 1,285 points, followed by TI2OE, 1185, and K5MDX, 1,150 points.

It was encouraging to receive a good entry in the Receiving Section this year and our congratulations are extended to the outright winner, DX-37A, in New Zealand, with a score of 6,085 points, WIA-L5030 second with 4,770, and BERS195 with 2,975 points. Special congratulations go to the one YL entry, Miss O. J. Martin with a score of 1,585 points.

## EXTRACTS FROM LOGS

BV1USB.—Was not able to operate as long as he wished, but enjoyed running up a score of 750 points.

ZS6IX.—Complains of high QRN level and poor conditions, but hopes to see us again next year under better conditions.

ST2AR, DL3LL, PA0LU and OH3TY all complain of QRM from W.A.D.M. Contest running on the same week-end as the C.w. Section. This, together with lack of VK-ZLs, made contacts hard to get.

DL1DX.—Our old friend, Hannes Bauer, ran up a tidy score of 1,200 points in the C.w. Section, but claims conditions were poor and feels that not very many VK-ZLs participated.

IIER.—Made only one contact, with VK9XK, after many hours operating in the Contest. He quotes, "Very sorry, hi."

K2DGT.—Quotes, "It was a grand contest but sorry to hear so few of you boys on."

W2EQS.—Had troubles galore, keeping his transmitter on the air. Trouble developed in the h.t. power supply, resulting in a succession of 14 blown fuses. Nevertheless, enjoyed the Contest and ran up a score of 1,970 points. He wants to know where the VK1 Hams hide out during the Contest?

W6GHH (ex-SVOWP).—Quotes "Best contest of the year and wouldn't miss it." Incidentally, he was the only foreign entry to make contacts on 3.5 Mc. with two ZLs and one VK.

ZL4GA.—Suggests the overseas scoring be based on a similar pattern as our own bonus scoring system, thus giving added incentive to contact five stations, at least, in each VK-ZL district. This suggestion will be given due consideration for future contests but will have to be weighed against some adverse comments received about the continual changing of rules and scoring. More anon.

VK5MS.—Quotes, "Plenty of overseas stations on the air looking for contacts, but very few VK-ZL stations. Evidently publicity abroad very good."

Several other comments were received much in the same vein as the above. The general opinions are that the contest was very enjoyable with expressions of disappointment at the poor participation of our own VK and ZL stations.

The scores are as follows:

## AUSTRALIA

C.w.—	10	15	20	40	Total
Call					
VK2ADE*	2790	4140	2530	1635	11150
2GW	3240	2440	4105	920	10705
2HV			650		650
VK3DQ	1355	3230	3285	1845	9715
3CX			3860		3860
3YD			3745		3745
3JF			3520		3520
3PL			3115		3115
3ARX			1490		1490
3RJ			770		770

\* Total includes 55 points on 80 metres.

VK4TY	1735	1635	3035	55	6460
4SN	835	1490	495		2820
4SD			2395		2395
4SS			2350		2350
4DO		825	1235		2060
4JB			490		490
VK5BS	525	1155	2440	960	5100
5MY	455	920	3290		4665
VK7JB	1230	1815	4220	390	7655
7KA	1375	2310	1900	455	6040
VK9XK	2035	2755	1960	740	7490
9RO	2005	2335	720	395	5455
9NT	650	1465	2415		4530

## PHONE—

Call	10	15	20	40	Total
VK2AKV	55	1230	55		1340
VK3AEE			5960		5960
3BM			890	1790	2680
3OP			1595		1595
3AFF			345		345
VK4DO		850	330		1180
VK5MS			8050		8050
VK7WA			2385		2385
VK9NT	730	2575			3305
9RO	455	1640	255		2350

## RECEIVING—

	Points
VK2 WIA-L2001	1990
BERS-195	2975
VK3 WIA-L3074	495
WIA-L3065	720
VK5 WIA-L5020	1575
Miss O. J. Martin	1585
WIA-L5030	4770
VK6 WIA-L6003	2525
VK9 WIA-L9004	1020

## NEW ZEALAND

C.w.—	10	15	20	40	Total
Call					
ZL1AH	3625	5130	4520	1180	14455
1MQ	2510	3550	2345	1390	9795
1AMM	1790	1585	3170		6545
1NG			5240		5240
1AFW	1060	2535	1605		5200
1TB			2180		2180
1MT†	1555	110	1295		1615
ZL2GS	2255	1860	4820		8935
2AWJ		2130	2955	1835	6920
2APZ			5340		5340
2IQ			610	655	1265
ZL3OB	1525	1090	3505		6120
3AB			2560		2560
ZL4GA†	345	2450	7190	715	10755
4CK			3250		3250

† Total includes 55 points on 80 metres.

## PHONE—

Call	10	15	20	40	Total
ZL1ACI			4675		4675
1MQ	585	1590	1390		3565
1HA	260	1430	1275		2965
1PV			1140	140	1280
1AMM			165	1020	1185
ZL2AHZ	55	1440	1670		3165
ZL3OB			2725		2725
3AB			1955		1955

## RECEIVING—

DX-37A	6085 pts.
--------	-----------



# OVERSEAS

C.W.—

## North and South America

Call	Pts.	Call	Pts.
CE3AG	1275	K5KBH	1945
CE3WZ	465	W5KC	1550
KZ5LC	510	K5UYF	595
PY4ADA	875	W6GHM	3095
T12CAH	835	W6IBD	2665
VE3BWY	995	W6KG	2340
W1JYH	980	W6LDD	2295
W1VIG	960	W6NKR	1790
W1WY	950	W6ID	1265
W1KQF	945	W6YVO	1240
W1AWE	775	W6IPH	1095
K1CUD	640	K6ICE	860
W2EQS	60	W6PHF	735
K2DGT	1970	W6ATO	655
K2UVU	1540	K8NLJ/7	290
W2NHH	730	W6BHW	2160
W2BEX	285	W8JIN	1785
W3OCU	1820	W8MCC	280
W3ARK	985	W8YPT	225
W4BJ	940	W8SPO	170
W4NPT	1805	W9WNV	1775
W4FFF	1575	W9SWR	530
K4UEE	725	W9KXX	480
	575	W0YCR	1170

## Europe

Call	Pts.	Call	Pts.
DJ2CM	640	OH3NJ	340
DL1KB	1495	OH7NW	340
DL1DX	1200	OH6OB	335
D31BK	985	OH2LA	275
DL3LL	1470	OH7NF	230
DL6EN	1125	OH1TN	225
F8TM	220	OH4NI	55
G5RI	1380	OK1KLV	285
G6XN	1250	ON4FU	1105
G5HZ	990	ON4LX	935
G3WP	110	ON4QX	575
G4RY	55	OZ6HS	120
GW3J	915	OZ4RT	55
HA1KSA	530	PA0NV	580
HA5BI	170	PA0PN	575
IER	55	PA0BV	450
IT1AGA	60	PA0LU	380
LA5HE	420	SM5CCE	750
OE1ER	1170	SM5AJU	400
OH3TY	705	SM4AEQ	355

## Europe (Continued)

SM5BPJ	175	TF3AB	115
SM6VY	165	UC2AR	110
SM3BIZ	110	UF6FB	55
SP6FZ	335	UR2BU	650

## Asia

Call	Pts.	Call	Pts.
BV1USB	880	JA2JW	1415
JA1VX	2330	JA3JM	1830
JA1BKV	1750	JA5FQ	375
JA1AS	815	JA7XF	285
JA1BCP	420	JATAD	115
JA1YL	340	JABDS	60
JA1BQR	220	JA8JG	110
JA1ANP	175	JA0AC	585
JA1AYO	170	VS6BJ	395

## Africa

Call	Pts.	Call	Pts.
FA8RJ	400	ZS6NE	1155
ST2AR	740	ZS6R	1085
VQ2CZ	715	ZS6IX	225

## Oceania

Call	Pts.	Call	Pts.
KH6BXU	1850	KR6MG	570
KL7PJV/KH6	1040	VR1B	2140

## Europe (Continued)

SM3EP	190	CT1EY	645
SM4AEQ	125	CT1PK	245
SM5AIO	60	LA5HE	110
UR2BU	815		

## Asia

Call	Pts.	Call	Pts.
HL9KJ	405	KR6QB	750
JA3JM	685	KR6RB	515
JA1BQR	415	9M2DQ	1285
JA1AS	55		

## Africa

Call	Pts.	Call	Pts.
ZS6UR	295	VQ3GL	120

## Oceania

Call	Pts.
KH6BXU	640

## RECEIVING—

### America

K2-7079	675 Points
W5-R. Harris	225 "

### Europe

BRS15822	1455 Points
BR56604	935
SP9-1022	865
SM5-2735	685
HE9-RAP	690
HE9-EVI	410
HE9-EWB	395
DL-8497	220
HE9-EZG	55
HE9-FAY	55
SM4-2825	Ineligible
PA0-37/MM	"
YO2-476	"

### Asia

JA6-1270	1275 Points
JA1-1578	1145
JA5-1094	790
HL-5001	575
JA1-1716	365
JA6-1322	Ineligible

## VACUUM MOUNTED CRYSTALS

for general communication frequencies in the range 3-14 Mc. Higher frequencies can be supplied.

**THE FOLLOWING FISHING-CRAFT FREQUENCIES ARE AVAILABLE IN FT243 HOLDERS, 6280, 4095, 4535, 2760, 2524.**

5.500 Kc. T.V. Sweep Generator Crystals, £3/12/6.

**ALSO AMATEUR TYPE CRYSTALS—3.5 AND 7 Mc. BAND.**

Commercial—0.02% £3/12/6, 0.01% £3/15/6. plus 12½% Sales Tax.

Amateur—from £3 each, plus 12½% Sales Tax.

Reprints £1/10/-.

CRYSTALS FOR TAXI AND BUSH FIRE SETS ALSO AVAILABLE.

We would be happy to advise and quote you as to the most suitable crystal for your particular application, either in the pressure or vacuum type holder.

New Zealand Representatives: Messrs. Carrel & Carrel, Box 2102, Auckland.

## BRIGHT STAR RADIO

46 Eastgate Street, Oakleigh, S.E.12, Vic.

Phone: 57-6387



## WANTED URGENTLY

### Transmitting Valves

Type 100TH, 250TH, 304TH, 304TL

Details, price and quantity available, to:

CONTROL OFFICER, B.C.A.S.,  
Flying Medical Service,  
Ceduna, South Aus.

## UNIFORMS DUST COATS

for your Office Staff, Factory, Workshop, Servicemen.

Bowls Frocks, Tennis Frocks, for the retail trade.

## D. MILBURN & CO.

3 Railway Avenue, East Malvern, S.E.5, Vic. Phone: UL 3131

## A SELECT LIST OF BOOKS FOR HAM ENTHUSIASTS

★ THE RADIO AMATEUR'S HANDBOOK, by Amer. Radio Relay League	46/3 and 2/9 post.
★ RADIO HANDBOOK, 15th EDITION, by William I. Orr, W6SAI ..	85/6 " 3/- "
★ V.H.F. HANDBOOK, by William I. Orr, W6SAI ..	34/3 " 1/6 "
★ BEAM ANTENNA HANDBOOK, by William I. Orr, W6SAI ..	32/6 " 1/6 "
★ A.R.R.L. ANTENNA HANDBOOK ..	31/- " 2/- "
★ "CQ" ANTHOLOGY—THE BEST OF "CQ" 1945-52 ..	20/9 " 1/6 "
★ COMMAND SETS, by "CQ" ..	15/6 " 1/3 "
★ NEW SIDEBAND HANDBOOK, by Don Stoner ..	31/- " 1/9 "
★ AMATEUR RADIO LICENSE GUIDE, by "CQ" ..	25/9 " 1/3 "
★ MOBILE MANUAL FOR THE RADIO AMATEUR—A.R.R.L. ....	38/6 " 2/- "
★ NEW MOBILE HANDBOOK—"CQ" ..	31/- " 2/- "

MAIL ORDERS BY RETURN

## McGILL'S AUTHORISED NEWSAGENCY

Est. 1860


183-185 ELIZABETH STREET, MELBOURNE, C.1, VICTORIA

"The Post Office is opposite"

Phones: MY 1475-6-7

## REDUCE THE SIZE AND COST OF YOUR NEW EQUIPMENT

TYPICAL  
UNITS  
USING  
ZEPHYR  
MATRIX  
SYSTEM

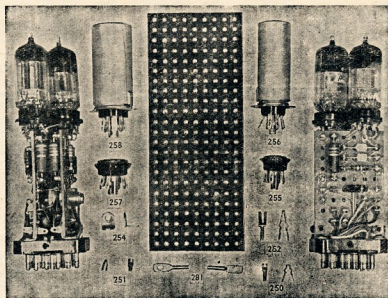

Leaflets and  
Price List available  
from all  
leading Wholesalers.



Enquiries invited  
from  
Manufacturers.

ZEPHYR PRODUCTS PTY. LTD.

58 HIGH STREET, GLEN IRIS, S.E.6, VIC.  
Phones: BL 1300, BL 4556

# Results of Geneva 1959 I.T.U. Conference

JOHN MOYLE, VK2JU

AS you know, I had planned to write this story in the fullest possible detail, and to report in person to every Division of the Institute on my return from Geneva. It is therefore a bitter disappointment to find that my health is not good enough to do this. However, I have already had several long talks with the Federal President, Max Hull, who now has a large quantity of Conference documents, including verbatim accounts of many important meetings, from which the case history of every Amateur band can be assembled for future reference.

This general survey will, I hope, assist the Amateurs of Australia to obtain a quick picture of what happened, and what I think we must do to get ready for the future.

Geneva 1959 is now only a memory. For better or for worse, the radio scene for the next few years has been re-defined, and the final agreement signed

would have seen how Amateur problems, important though they are to us, are only a small part of the incredibly complicated pattern of modern communication.

He would have seen, too, the stubborn and altogether admirable fight put up by all those interested in Amateur Radio in the face of this opposition, a fight in which every band has been retained, in most cases intact, and a final result obtained appreciably better than most of us hoped for.

I have already told you of the enormous dimensions of the conference, with its 1,000 odd delegates, committees to the tune of about 100, and millions of foolscap sheets which made up the daily working documents. I have also outlined the committee and working group structure by which the mass of proposals was processed and decided upon.

wrangles about the 7 Mc. band and its impact on broadcasting. Many powerful and even impassioned speeches were made in their defence, and I for one could not have wished for better treatment of our case.

Secondly, the quality and quantity of Amateur representation was better at Geneva than at any previous conference. Apart from myself, A. L. Budlong and John Huntoon of the A.R.R.L., were attached to the U.S. delegation as Amateur representatives, and Len Newnham for some weeks to the U.K. delegation. There were also five I.A.R.U. representatives from Region I countries, led by John Clarricoats (G6CL), who were present from time to time, and they did some useful work, particularly in sorting out some of the problems peculiar to that Region.

But best of all there were capable delegates from many countries such as U.K., U.S.A., New Zealand, Argentine,



The Batiment Electoral, Geneva, location of the I.T.U. Conference.



Alex Reid, VE2BE (left), A.R.R.L. Director for Canada, chatting to John Clarricoats, G6CL (right).

on December 21. The full document is now being printed and should be available for distribution quite soon.

Its pages of tables and regulations will clearly reveal how much work went into their preparation, but can tell nothing of the drama, the dangers, the tension, and the hours of frustration and achievement through which we lived during the long weeks of the conference.

## MOMENTOUS CONFERENCE

Without doubt this was the most momentous conference of them all, one which grappled with the virtually insoluble problems and mistakes of the past, and attempted to deal with even more sweeping demand which we know the future will bring.

I only wish every Amateur could have been present at least part of the time. He would have learned about the enormous pressures on frequency space which have literally made portions of the spectrum unworkable; he

My stay at the conference was from the commencement on August 17 until November 19, the longest stay of any purely Amateur delegate with the exception of A. L. Budlong, General Manager of the A.R.R.L., who remained for a week or two after I left. By the time I caught the plane for home, all our problems had been dealt with, and were being confirmed at the Plenary level.

Some minor changes took place here, all in our favor, and all the result of ground-work already done.

## AMATEURS RECEIVED AN EXCELLENT HEARING

Firstly, let me say that the Amateurs received an excellent hearing at every level of the conference and a very fair hearing at that. Even where criticism and opposition were hottest, every point was fully debated and fully considered. Many long and important meetings were devoted to nothing else, particularly the series of Committee 4

Canada, Brazil, South Africa and some others who, being the actual spokesmen at meetings, fired the real bullets when the debates began.

Naturally we got together on every possible occasion to discuss the position and this team work was quite a vital factor in getting things done.

In these circumstances, the importance of a Region III representative being present cannot be over-emphasised.

## BAND ALLOCATIONS

At this stage it might be appropriate to run through the bands to see how we fared. I'm afraid this will involve some duplication of earlier reports, but I will give the picture in general without including all the odd footnotes involved. Later on, when the Geneva Regulations are available, no doubt "Amateur Radio" will print extracts from the tables in full.

To help matters, I can say that in Region II, there were no changes of any importance to the old band allocation.



tions. This was due undoubtedly to the preliminary work carried out by the U.S.A. in lining up all the countries in North and South America so that any disagreements existing between them would not appear in the tables.

By their numbers, organisation, excellent liaison with the F.C.C. and commercial friends, the American Amateurs exert a powerful influence, so much so that their delegation was persuaded to flatly oppose each and every proposition to change the status quo, and to be supported almost universally in Region II. This solidarity overflowed to the advantage of Amateurs in both Regions I. and III., and to me was an object lesson in how to organise.

I shall not, therefore, mention Region II. in what follows.

#### 1.8-2 Mc.

There was no problem here from our point of view. The status quo remains, and we share with Fixed, Mobile and Rationed. The P.M.G. has not given us a general allocation here, but in view of our other losses, maybe we can persuade them to find a suitable spot.

In Region I. there was a fine old discussion for and against Amateur operation, some Europeans being bitterly opposed, while others who had not previously allowed Amateurs nor wished to include them. U.K. was a strong supporter here. Finally, a maximum section of 200 Kc., with a power of 10 watts, was allowed by footnote in Austria, Czechoslovakia, Denmark, Finland, Ireland, Netherlands, Germany, Rhodesia and Nyasaland, United Kingdom, Switzerland, South Africa and South West Africa. European countries must co-operate to avoid interference with other services.

#### 3.5-3.9 Mc.

This band is allocated generally to Region III., shared with Fixed and Mobile, but by footnote Australia has restricted Amateurs to 3.5-3.7 Mc. exclusive, the remainder being given to the other services. India has an even more drastic footnote limiting Amateurs to 3.89-3.9 Mc. From our viewpoint, this limitation comes from the P.M.G. and is in line with Australia's original proposal. Frankly, I find difficulty in appreciating the need for this footnote, because being a shared band, local administrations have authority to split it up in any way they choose, without further reference to the frequency table. In fact they have already done so.

But appearance in the table means that they cannot reduce our band any further.

#### 7.1-7.3 Mc.

Regions I. and III. have lost the use of the shared portion between 7.1 and 7.15 Mc., which becomes exclusively broadcast. But there is a rider that broadcast stations must vacate the exclusive Amateur portion between 7 and 7.1 Mc. Frankly this isn't worth much, because several countries now poaching there announced quite openly that they won't move until given clear channels, of which there are none.

To test the practicability of this rider, the Americans proposed that Amateurs should continue with the present allocation until the International Frequency Regulations Board (I.F.R.B.) declared that the poachers had moved out. After a vigorous debate, the proposal was defeated by only two votes.

**Australia was the only English speaking country which voted against it.**

But in all fairness, it wouldn't have done much good if carried, for the determination of countries such as Pakistan to stay put would have merely meant reversion indefinitely to the status quo.

And as so many countries have obviously been told to get that 50 Kc. or else, they were happy to go along with the pious hope of clearing the Amateur band, but were not prepared to wait until the hope became reality.

As I have already said, the standard and bitterness of the debates on this matter, the special committees set up to handle it, and the good old duck-shovelling that went on, convinced me that high political hands were at work, far beyond any capabilities of mine to influence.

The relative documents even refer to the undesirability of Amateurs sharing bands with broadcasting, which put the death-blow to my initial efforts to get daylight sharing.

But our case for the latter is so good that I for one wouldn't stop trying.

A hard pill to swallow was the general agreement on an engineering level that bad band management, jamming, and duplicated services were largely to blame for the congestion on the broadcast bands. Unfortunately, national prestige is so wrapped up in having mighty voices on the air (and who listens?) that even the smallest and newest countries are spending more than they can afford to join the chorus. No one will give way, and so the mess continues.

The Amateur didn't get a chance except in Region II. where broadcast demands apparently are more modest.

Incidentally, the leader of the New Zealand Delegation made a particularly good speech in defence of this band in which he paid a glowing tribute to the value of his own and other Amateurs and their work for the community. It was a highlight of the discussion.

#### 14-14.350 Mc.

The thing which saved this band was the refusal of the U.S.A. to agree to any curtailment. Both the fixed ser-

vices and broadcasting would have liked a slice of it, and both made moves to get it.

But both were prevented from coming into an open meeting where they might have gained some support, and perhaps secured some regional arrangements, however impractical.

I was, therefore, particularly pleased that Australia was persuaded not to press her proposal to cut the band by 100 Kc.

This left India's even more drastic proposal to cut 150 Kc. off the high end for broadcasting out on a limb, and it got no further.

But fundamentally, no one was enthusiastic about pushing a lone hand against powerful American Amateurs who are audible somewhere or other all around the clock.

And while this position remains, I don't think they ever will.

#### 21-21.45 and 26.90-27.23 Mc.

The 21 Mc. band was conned from many angles and quite a few suggestions were made for slicing it for various reasons, but none of them made the grade. When I left Geneva there was still a suggestion, unsettled, to allocate 5 Kc. at 21 Mc. for space research, but apparently it was abandoned for I see no mention of it in latest advice. So this band continues unaltered.

The 27 Mc. band is available in Regions I. and III., shared with industrial, scientific and medical services, and we can use it if we wish.

#### 28-29.7 Mc.

This was a most hotly contested band. At least three special group meetings were devoted to fighting off proposals from the meteorological aid people, who wanted half a megacycle for their old-fashioned radio-sondes, and from France and Japan, in particular, who wanted slices in which to operate fixed and mobile services. To me our success here was the best example of organised Australian resistance, in which our own Australian delegation played no small part.

When I left Geneva, the met. aids had been successfully countered, but there were two proposed footnotes to allow fixed and mobiles in Europe and Japan to use part of the high end.

Apparently the battle against these was joined once more in the Plenary session, for the footnotes do not appear in the table, as I have it now, and the band is therefore unchanged.

It is probable that fixed and mobile services will operate under Section 88 of the Regulations, which means that they do so at their own insistence and without any protection against interference, particularly as I think Japan has been operating with low power for river boats for some time. They are not likely to be a serious worry to us.

#### 56-58 and 146-150 Mc.

These bands have been re-aligned in Australia to fit in with our t.v. assignments, and two megacycles have been taken from the lower band. This is unfortunate, but as we have never used the full four megacycles in the past, it is not surprising that the authorities should think we didn't need it. Should it be decided not to proceed with the suggested Band 1 for i.v., it could be



Some Amateurs present at I.T.U. Conference. Left to right: Steve Chisholm, VE2ATU; John Moyle, VK2JY; John Hantson, W1LQV; John Clarricotts, G6CL; Wayne Green, W2NSD; Don Vaughan, ZL2VA; Arthur Milne, G2MI; and Adolf Dominkus, OE1AD.

that we would get our old 50-54 Mc. assignment back again, which would be fine. At the moment we can only hope.

As both bands are out of step with world-wide assignments, they are covered by special footnotes to the table.

#### 420-450 Mc.

This has been a shared band for Amateurs although we have never had a firm allocation. Our original proposals omitted Amateur altogether, and one of my tasks was to remedy this if I could.

This was eventually made possible because of the introduction of a new Radiolocation type of service, the sponsors of which had no objection to sharing with Amateurs when the service itself should be established.

This band now is fully occupied with Fixed and Aeronautical services, but in the next few years changes are likely to occur which could make it possible for us to use it. At any rate, we are back in the table, and some day we might well be very glad that we are.

1215-1300, 2300-2450, 3300-3500, 5650-5850, 10,000-10,500, 21,000-22,000 Mc.

These bands follow the general pattern of the highest frequencies in the table, except that they have been extended beyond the old limits and are all annotated as shared with Radiolocation in Region III. In all cases, the latter has priority.

The band 3300-3500 Mc. is another from which Amateurs in Australia had originally been excluded, but it was found possible to change thinking on this point.

#### MORSE CODE

A point of interest is that the lower frequency limit for which the Morse Code is required has been raised to 144 Mc. Australia had proposed this to be 50 Mc., and was supported by Argentina. Both the U.K. and U.S.A. initially opposed this and just before I left Geneva had compromised at 250 Mc., (not a very practical figure) and no arguments of mine could shift them. However, they must have had second thoughts, for at a subsequent Plenary meeting, they agreed to 144 Mc.

Our delegate fought hard on this proposal, but in any case it will not be allowed to affect the terms of our limited licence. It just brings the figures so much closer.

#### LESSONS LEARNED

Geneva taught me several new lessons and underlined many old ones.

Fundamentally, these conferences are meetings of national delegations, each of which has a vote. It follows, therefore, that the first aim is to convince each delegation that the claims of the Amateurs are as strong as those for any other service and thus to secure votes for them.

It is far too late to initiate action at the conference itself, by which time most decisions have been made up to this level.

It follows, too, that the Amateurs should work on a long-term basis to establish good will and a high priority at home, and on a short-term basis to see that they always have a representative as a member of the delegation to

press home the Amateur position and improve it if he can.

A team of such Amateur representatives can wield a powerful influence, even if it does not include a member from every country, which would be too much to ask.

We fell down because of our preliminary work over the years was not good enough, and we were obliged to take drastic action at a late hour. It is true that the inexplicable attitude of the P.M.G. in several matters did not help, but the fact remains that the members of F.A.S.C. who prepared our brief, did not understand the Amateur position, and were thus unduly influenced by the P.M.G. representatives and their assessment of our proposals.

At Geneva I am quite sure that I managed to effect a big change in this, and ultimately found our delegates most helpful in all matters which did not contradict the Australian brief.



Delegates in attendance at the Plenary Session.

Many of them did good work for us in defending our bands when they were under attack.

Had this attitude prevailed during the initial F.A.S.C. meetings, we may have started out more favorably.

The countries which really carried the fight for Amateurs were those such as the U.K. and U.S.A. in which Amateur organisation is well developed and relations with the authorities and others are good.

In countries where ordinarily the reverse is the case, dangerous weak spots were apparent.

#### I.A.R.U. Ineffective Body

The I.A.R.U. is not a very effective body at such a conference.

In the first place, there is no national co-operation except in Region I, in which the R.S.G.B. is the dominant

society. In Region II, the prestige and influence of the A.R.R.L. renders it unnecessary, and in any case the A.R.R.L. officers (also federal officers of the I.A.R.U.) cannot perform both jobs at the conference. Region III is so dispersed that no real I.A.R.U. representation is practicable.

It is frequently helpful to have an I.A.R.U. representative who can speak more freely than an Amateur attached to a delegation, but in the present circumstances it is only natural that the I.A.R.U. representatives, all from Region I, are strongly pre-occupied with their own problems. It is hard to visualise any practical method by which the I.A.R.U. could finance and support a really representative organisation covering the world.

Nevertheless, the I.A.R.U. team worked hard and I do not mean to belittle their efforts by these general comments.

#### Our Own Outlook

Closer to home, we have two major reforms to make.

Firstly, we must obtain a much greater sense of Federal responsibility from the ordinary Amateur and from the Divisions. At the moment, this sense is at its lowest ebb and has been for years.

Coming straight from Geneva, where our very future was being battled for, I was astounded and discouraged to find that Divisions had voted against holding a Convention this year. At the very time when our future and past organisation is of primary importance, the Federal Council was not to meet, apparently because it couldn't think of anything important enough to discuss.

We must find Councillors and Divisional leaders who have much wider

(Continued on Page 15)

# N.S.W. 10th Annual Convention at Dural, 30/1/60

## OUTSTANDING SUCCESS OF NEW FORMULA

"HELLO, hello, pleased to meet you at last old chap, golly I never thought you looked quite like this, but never mind, all the times we have talked on the air we have really had such fine contacts that we are darned glad you came along. Where are the family?" "In the car." "Well come along to the registration booth and get fixed. Yes, only a reasonable charge for each adult and the kiddies under 16 are on the house. One of our team of associates will register you and the wife, and don't forget to pick up your A.W.V. folder containing all sorts of technical information and an azimuthal map for your beam. Now you have registered, old chap, just park the car, the parking marshal, yes, the fellow with the arm band, will position your car for you, so that it is safe and can be removed easily at any time. OK? See you when you get set and I will take you round the show."

equipment referred to at a receiver may be on the way out. Harold had many transmitters, a few inches square, powered by a few dry cells; a communication receiver in three small sections, similarly powered; a t.r.f. receiver on the broadcast band which was doing its best to get above the noise of the fair, and doing it well. One fine display on this stand was the exhibit of many types of transistors, silicon rectifiers and diodes which was made available by Mullard (Aust.) Ltd. and which will be instrumental in many of our group appreciating the value of semi-conductors at a while.

Next in line was the mobile exhibit, consisting of cars owned by 2AAH, 2AI and Jim 2PM, illustrating the manner in which mobile equipment can be installed in any type of car. Renewing more acquaintances we went over to the i.s.b. tent, where we received a good grounding on the merits of s.b. by Leo McMahon, VK2AC, with his cohorts Stan Bourke, VK2EL; Don Pollard, VK2ASW; and Barry White, VK2AB, ever ready to spread the s.b. gospel, and many converts will be at the ready with iron and side cutters to convert that piece of gear which has been awaiting its owner getting the dope straight from the horse's mouth, so to speak. A number of countries were worked on this home-constructed gear and despite conditions being quite

THE Official Opening of the Convention was performed by the Divisional President, Dave Duff, VK2EO, who presented the Councillors present—Ted Whiting, VK2ACD; George Turner, VK2CB; Max Pfeffer, VK2MP—and also presented the President of the Hunter Branch, Lionel Swain, VK2CS; Wal Hannam, VK2AXH; Bill Otty, VK2ZL, and others.

Activity was noticed at the side of the building. It was the Blindfold Transmitter Hunt, conducted by the Blue Mountains Section, and attracted a lot of interest by all present. Sections and heats were run off all afternoon in the ladies, gents, boys, and girls' classes.

Afternoon tea was served in the rest area by the catering committee, consisting of Mrs. J. Duff, Mrs. M. Stahl, Mrs. A. Whiting and daughters.

Following a further inspection of the gear on show, the keg show was opened under the direction of one of our country members, Ken Scott, VK2XS, and assisted in a most experienced manner by Sid Molen, VK2SG; Ern Marziella, VK2AEZ; and Ken Ledsum, VK2ST, and last but not least by the custo-



OPENING CEREMONY  
Left to right: 2ZL, 2CS, 2ACD, 2MP, 2AXH, 2QL, 2CB, 2ALJ, 2EO (Pres.)

VIEW OF CONVENTION IN GROUNDS OF VK2WI, DURAL.

This fellows, was the formula of the 10th Annual Convention, held at Quarry Road, Dural, the home of VK2WI, on 30th January, 1960, when the N.S.W. Divisional Council played host to the many country and city members who attend these functions each year. (Certainly, come along next year, but first see what you missed.)

Well, we went along with our new-found friend and proudly showed him the many attractions which had been organised for the great day, organised over some months with the fellows who so generously gave their time and gear to illustrate the growing scope of our hobby, AMATEUR RADIO.

We went along first to the display of old timers' equipment, which was capably arranged by our old friend, Joe Reed, VK2JR, assisted by our foundation member, Wal Hannam, VK2AXH, and saw among the neatly arranged and adequately ticketed collection, gear with which we used to play in the years gone by, and I must confess some which we had never seen, sheer nostalgia on this stand of Joe's.

Passing on and meeting many old and new acquaintances en route, we reached a new exhibit, that of Transistory, under the organisation of Harold Burdett, VK2AH, assisted by Muriel Eagles, VK2AIA, one of our few ladies of the air waves. Much interest was displayed in this collection of gear and it showed that the days of the large piece of

poor, the signals just appeared to pour in and working these stations seemed easy.

As we approached the large crowd around the shed, which, incidentally, contains the emergency power plant which later on supplied some 12 kw. of power for the auxiliary outside lighting, we had no delusions that a disposals sale was in progress. Several perspiring gentlemen were dispensing the gear; Harry Solomon, VK2AJZ, and Noel Hanson, VK2ARH, and others were assisting the leader of the team, Alan Williams, VK2FH, who for many hours were kept busy by an ever increasing crowd.

Moving on again, we visited the display organised by John Larkie, VK2ZAV, and his team of the V.H.F. and T.V. Group, this one of further interest to the country fellow who rarely sees the other fellow's gear at all, and the boys in charge were of course at the ready to answer all queries. The antenna in use here was a novel innovation, a 60 ft. collapsible tower and beam mounted on a small truck.

By this time the afternoon was passing, the crowd rapidly increasing, and a visitor was paid to the Secretary's tent where Norm Beard, VK2ALJ, was in attendance to answer all requests. With Norm was the QSL Bureau with the QSL officer, Frank Hine, VK2QL, officiating, dispensing DX cards to all and sundry, and in his spare time attending to the water boilers and generally assisting the ladies who were so busy preparing the afternoon tea.

dian of the Garden of Eden, Col Fletcher, VK2ASF. Reminiscences were related by many over a glass of cheer and eventually it was announced that the 800s had been successfully de-modulated to the satisfaction of all. During the tea interval, when more tea was available, and drinks for the kiddies dispensed, all over the grounds were groups gathered around their cars attacking the contents of the baskets of cats Mum had brought along.

The evening show commenced at 8 p.m. and was in the form of a mammoth quiz with mammoth prizes. Participants were selected by ballot and were questioned by the compe, Max Pfeffer, VK2MP, resplendent in white tuxedo and black pants. The questions were many and varied, and consisted of the information which every Amateur should know, gleaned from such sources as "Amateur Radio", Handbook for Operators, A.R.R.L. Handbook and Radiotron Designer's Handbook. Much meritment accompanied many of the answers and finally the two finalists, Bill Shakespeare, VK2AGF, and Lindsay Douglas, VK2ON, faced the final round. It is now history of course that Lindsay ran out the winner by one point over his opponent. Prizes were presented during proceedings by Bill Moore, VK2HZ; Bob Bensley, VK2XP; and Dave Duff, VK2EO, to the fortunate recipients who were as follows:

(Continued on Page 15)



## RESULTS OF GENEVA 1959 I.T.U. CONFERENCE

(Continued from Page 13)

vision than this. All our excellent, and often elaborate, Divisional set-ups will be of little use if we haven't the bands to use them.

Secondly, we must evolve a Federal set-up which will work, which will attract Councillors of high standing and experience who can tackle the job of improving our own standing and priority in the communications world.

At present the Federal Council isn't doing its job, and the Federal Executive has become exhausted trying to cope with an almost impossible situation.

I am not intending here to supply a set of answers to this matter, which is an ideal item for a Convention if ever there was one. But I do say that unless we are prepared to solve the problem, and to spend money doing it, we can't blame F.A.S.C. or anyone else if they overlook Amateur claims because we are inadequately organised to handle them.

To my mind it is an urgent and critical situation.

I must conclude my report at this point. I suppose we must always regard a conference involving losses as a failure, but I believe that, in the circumstances, we have a great deal to be thankful for. At least I did the best I could to help bring this about. I believe that every Amateur who lacks his licence to the wall must shoulder an inescapable responsibility to his fellow Amateurs and to the Amateurs of the future. If he fails them, they must suffer and may even cease to be. Please think about this, for it is the key to everything that I have written here.

## N.S.W. 10th ANNUAL CONVENTION AT DARUL

(Continued from Page 14)

Quiz champion, Lindsay VK2ON, who received an H.M.V. Little Nipper Radio; Quiz runner-up, Bill VK2AGP (Sunday Frypan); quiz 2nd round, Stewart VK2ZDF and Noel VK2AHN each received a DG7-5 c.r.o. tube by courtesy of Mullard Ltd. The other participants in the quiz each received prizes of tubes donated by various firms. Lucky Gen's number, Mr. Conrad, Hecla Kettle; lucky lady, Mrs. A. Hart, XYL of VK2HO; most distant member within VK2, Mr. Murrell, Hiltson, an AR7 receiver; most distant lady within VK2, Mrs. I. McKosker, table lamp; most distant visitor, VK2AVI, AR7; 2nd most distant lady, Mrs. C. Fletcher, XYL of VK2ASF, bed lamp; blindfold to hunt prizes: genis, Peter VK2JX, VK2ZOW; ladies, Mrs. I. Kinscher, XYL of VK2ADL, Mrs. P. Adams, XYL of VK2JX; boys, Peter Agar, Stephen Adams; girls, Judith Johnson and Victoria Stewart.

The thanks of Council were expressed by the Chairman of the Organising Committee, Ted Whiting, VK2ACD, to all those who toiled so hard to make the function the outstanding success it was, and also tributes were made to E.M.I. Ltd., Martin de Louney Ltd., Mullard Aust. Ltd., A.E.I. Ltd., Lawrence and Hanson Ltd., A.W.V. Ltd., U.R.D. Ltd., and Idwal Jenkins Pty. Ltd. for their generosity in providing such an excellent prize list for the occasion.

Dave Duff VK2EO, in closing, passed thanks to all the 469 who attended this Tenth Annual Convention occurring in our Jubilee Year, and invited all members and their families and friends to the next Convention in 1961.

Registrations: VKs 3AVK, 2XS, 2XP, 2ARC, 2SG, 2EO, 2AXH, 2AEZ, 2NK, 2XX, 2AGF, 2MP, 2AFB, 2ASF, 2DO, 2ACO, 2AEY, 2AZW, 2MZ, 2JR, 2CB, 2ACD, 2ALJ, 2TQ, 2ANI, 2ADL, 2ANC, 2FM, 2ST, 2OQ, 2QA, 2HZ, 2AI, 2ON, 2XT, 2FP, 2VB, 2ASQ, 2AZG, 2AKB, 2AKI, 2RM, 2AMK, 2AIA, 2AAH, 2DE, 2DM, 2VU, 2XY, 2MU, 2ASV, 2VA, 2VJ, 2ET, 2AAB, 2AWZ, 2AC, 2ATZ, 2AXK, 2SP, 2UJ, 2VM, 2ANN, 2SF, 2CS, 2ABZ, 2ADF, 2AER, 2HP, 2AAJ, 2ZA, 2YB, 2LS, 2ACR, 2AFA, 2AKX, 2ZL, 2AIM, 2AZZ, 2GE, 2AIX, 2ASW, 2PY, 2BP, 2ABP, 2ALV, 2AVL, 2RJ, 2VN, 2WE, 2EK, 2EL, 2ZO, 2AAW, 2ACP, 2AVK, 2VN, 2XQ, 2TW, 2APU, 2PZ, 2AIV, 2AST, 2AVY, 2WJ, 2IK, 2ACK, 2ABB, 2ACQ, 2ABM, 2AAT, 2AHH, 2AOQ, 2SW, 2AEZ, 2AKE, 2AJQ, 2VJ, 2RU, 2PI, 2VL, 2APQ, 2FY, 2AT, 2VJ, 2SA, 2OT, 2IO, 2AEZ, 2NT, 2PJ, 2AGP, 2AQY, 2AIC, 2AMA, 2QI, 2VH, 2OA, 2FH, 2ZCS, 2ZFW, 2ZGW, 2ZDM, 2ZBX, 2ZAR, 2ZCM, 2ZCP, 2ZTM, 2ZBB, 2ZEF, 2ZDF, 2ZNM, 2ZCL, 2ZCF, 2ZJC, 2ZKO, 2ZLS, 2ZHW, 2ZUL, 2ZEW, 2ZAF, 2ZLH, 2ZMB, 2ZDK, 2ZCW, 2ZPC, 2ZCA; Associates 75, XYLs 45, and juniors 120.

## ANNOUNCEMENTS

The South Western Zone of the Victorian Division of the W.I.A. will hold a Convention at Ballarat on Saturday and Sunday, 2nd and 3rd April, 1960. Dinner and entertainment will be provided on Saturday. Sunday will be a day of activities; YLs, XYLs and harmonics specially welcomed; Picnic style Lunch (tea and sandwiches provided if required). There is to be an All-Band Scramble, 80-6-2-1 metre Competitions and novelties with good prizes. Baby Sitters provided for Saturday night programme. Dinner and accommodation bookings (deposit £1) by 25th March, to Brian Stares, VK3ZBS, 17 Daffodil Street, Wendouree West.

## Low Drift Crystals FOR AMATEUR BANDS

ACCURACY 0.02% OF  
STATED FREQUENCY

3.5 Mc. and 7 Mc.  
Unmounted ..... £2 10 0  
Mounted ..... £3 0 0

12.5 and 14 Mc. Fundamental  
Crystals, "Low Drift,"  
Mounted only, £5.

THESE PRICES DO NOT  
INCLUDE SALES TAX.

Spot Frequency Crystals  
Prices on Application.

Regrinds ..... £1/10/0

**MAXWELL HOWDEN**  
15 CLAREMONT CRES.,  
CANTERBURY, E7,  
VICTORIA

## IRONCORE Soldering Iron Transformers

TYPE T1/50 FOR USE WITH SCOPE IRON

TYPE T3/56 FOR USE WITH 6V. OXYX IRON

TYPE T3/58 FOR USE WITH 12V. OXYX IRON

**IRONCORE TRANSFORMERS PTY. LTD.**

HIGSON LANE, MELBOURNE, C.1

Phone: 63-4771

# OPERATION TOKELAU—ZM7DA

PETE ALEXANDER,\* VR2DA/VK2PA

If any one had stated that I would be operating ZM7DA in the Tokelau Group by early January, I would not have believed them, however strange things happen, and a casual mention on the VR2 7 Mc. net brought me into the picture. Allan Akins, VR2AP, the Fiji organiser of transport, mentioned on the net that a VR2 c.w. operator who was prepared to take out a ZM7 call was required and efforts to this date, late November, had been unsuccessful. Doc W3PQA, the expedition leader, was anxious to get cracking as early as possible if the trip was to be made before the setting in of the hurricane season. After my acceptance, finalisation of Doc and Al's plans were instituted.

The 45-ton cutter, M.V. Maroro, was chartered and Tuesday, 29th December, fixed for E.T.D. Suva Doc shipped out a KWM2 via air from the States, which was collected in Suva, checked and air tested by Al. My gear contribution consisted of modified TA12, Bendix SX28 receiver and 10 watt a.c.-battery operated portable for standby and mobile marine use. Several of the VR2 boys also contributed other needed equipment.

We departed on schedule from Suva and the party consisted of Doc and Mrs. Meridith, Mrs. Akins (Al's XYL), myself, Captain Brown and eleven crew.

Mobile marine gear was quickly set up in one of the cabins consisting of the SX28 receiver, and mobile rig a.c. gas operated 110 volt alternator tied on the aft deck, half wave 7 Mc. dipole rigged as an L and a trap dipole clamped to aft mast for higher frequencies. VR2DA/MM contact was immediately established with Fred VR2CC, who was available to keep a continuous watch on 7040 Kc. for the next three weeks. Suva received a late hurricane warning, and by the time we were out of the reef passage, seas started to build up, and by 5 p.m. we were running in gale-force winds and 30-foot seas, being the fringe of the hurricane that caused extensive damage to Port Vila (YJ1), Southern Viti Levu, and Toga (VR5).

At the northern Fiji Group, the skipper decided to take shelter for the night at a small cove (Nabuvatu) on the island of Vanuabalavu. Early next day, after receiving route forecast, and weather report via 7 Mc. net, and plotting course of hurricane, we proceeded again on course for Apia, Western Samoa, our first port of call, to obtain clearance and licence etc. for Tokelau. The seas had abated a little although the big rock and roll was still with us.

7 Mc. skeds were kept three times daily with the VR2 gang and necessary weather reports were passed via this frequency, and proved invaluable through the entire trip.

We arrived at Apia at 1200 hours on Saturday, 2nd January, after having two New Year eves at sea, and welcomed by Lloyd Webber, the Tokelau administrator, who treated the party to lunch and sight seeing. Our allocated call sign at this stage was ZM6AP/ZM7, but Lloyd promised to do all he could to obtain a ZM7 call from New Zealand.

Departed Apia 1700 hours after re-watering, etc., and sailed due north for the Union Islands, still working mobile marine with 10 watts and getting excellent results from VR2 which was the main concern at this stage.

Doc did a little W3PQA/MM on s.s.b. and contacted his home station and several of the State-side boys. This section of the trip proved more comfortable with only moderate swells, nevertheless enough to make the women members seasick again.

We arrived Nukunonu, Tokelau Group, Monday, 5th January, at 1500 hours after passing Nuafoou (Tin Can Island), an active volcanic peak, Swains Island and Fakaofo Atoll, the southern group of the Union Islands. Seas, fortunately, were calm close in to the reef and enabled gear, food, etc., to be transported through the narrow reef opening in the small double-ended boats made available by the Tokelauns.

Father Deerosiers had been informed of our coming and had us quickly installed in a section of his prebatory. Gear was set up, antenna erected and operation commenced with ZM6AP/ZM7 at 0605 G.M.T. on 5/1/60. At 1845 G.M.T. on the 6/1/60 we received a radiogram from New Zealand, via Apia, granting us ZM7DA, and operation was then commenced with the new call, which proved a time saving factor in operating.

Incidentally, the ZM6AP/ZM7 is officially recognised by A.R.R.L. and will count the same as ZM7DA for DXCC purpose. For those who worked ZM6AP/ZM7, a ZM7DA QSL will be sent, but don't be confused if you worked the pirate on 21 Mc. using ZM6AP/ZM7 on the 4th January. This guy seemed to be quite active, but was soon eliminated by our own constant activity.

The gear was not without faults, the KWM2 chassis had to be distorted to obtain grid drive, but it operated f.b. this way. Doc handled the s.s.b. and myself the c.w. What pile-ups! I'm sure Doc must have crystal T notch filters in his ears to sort out the pile of s.s.b. C.w. was a little easier as far as I am concerned, and must say here that the KWM2 is a very smooth rig to operate, auto switching and break-in facilities which made it easy. The TA12 was also used on 28 Mc. c.w. for a

time and operated very effectively into the G4ZU beam. The main antenna used was a high gain travelling trap, three-band dipole 30 feet high and rotatable, 7 Mc. dipole for VR2 information, and a 14 Mc. dipole for stand-by.

Radio conditions were just fair, good conditions generally except to Europe. We knew we were being called but most European signals had that rapid flutter which makes copy so difficult. Perhaps if the time had been available to match the G4ZU into the KWM2, signals would have been better. Our 110 volt a.c. outfit exciter section refused to excite, but this was overcome by the use of a couple of 6 volt accumulators brought along. 44 gallon drums of petrol were beached by the flotation method, and it was quite an experience watching the locals swim in from a quarter of a mile out or so, through the swell, pushing the drums with their chins.

Doc and myself took turns at operating. This enabled us to stretch our legs and recuperate after each session. Nukunonu is a very pretty isle, approximately 500 yards wide and 4 miles long. At low tide, only a few feet above sea level, covered with coconut palms, breadfruit, Kanava and Nuku trees, it is only one island in this particular atoll which consists of 30 islets surrounding a central lagoon, enclosed by reef.

The hospitality of Rev. Pere Deerosiers, sister and people of Nukunonu is beyond words. We were fed and fatted like a regal party. Several local dances were performed for us and the children's plays were in English. The language there is a dialect of Samoan, and although several of the words are the same or similar to Fijian, of which I am conversant, it was necessary to have an interpreter, or use simple English. Doc and I took the opportunity during spare moments to do an odd job or two on the few domestic radio sets that are there. New antenna leads, r.f. and aerial coil tune up, etc. The people are very self supporting, and apart from the copra, they grow and export, there is little other income, but they are very happy and contented.

It was a sad day, Monday, 12th January, when we had to depart for our return journey to Fiji, direct a distance of 900 miles. The departure date was accelerated by another low depression warning from the Met. Office at Suva, passed via 7 Mc. net. As mentioned before, weather reports were of great assistance as there being no anchorage, the Maroro had to drift off the atoll during our operations and any blow, would have had to leave the area.

Left: Pete VR2DA/VK2PA at Mike of ZM7DA.  
Right: Doc W3PQA at Mike of ZM7DA.



Gear was packed during rain squalls; the sea was building up and breaking on the reef. After consultation with the Tokelaun boys and Captain Brown via R/T, it was decided to try a light load first. This was successful but not without breaker shooting. Six trips were required under light load conditions, and not enough praise can be given the boys on the paddles. The only lost equipment was Owen's (VR2DK) power supply and few odd tools which now rest at 1,000 fathoms.


The return trip to Fiji was not without its events, many rain squalls, poor visibility, rough seas, and 40 knot gusty winds. Plenty of bruises all round, but we arrived safely at Suva, 1800 hours, Sunday, 17th January, a total distance travelled being 1,780 nautical miles at an average speed of 6.4 knots. The

depression on the last leg built up to hurricane force and devastated Nine Island a day later—the second time in 12 months.

I thank Doc for having me along. On behalf of Doc and myself, thanks go to all the boys who assisted in making the operation a success. 3,000 QSOs were made and 65 countries worked. Regrets go to those who called but did not quite make it.


I might add that the cost of the expedition was considerable and was shouldered by Doc, without any thought of getting any of it back. As far as I know there were no sponsors and no free gear. It is understood that several of the W boys have made contributions since our return to Fiji.

Ask me if I would do it again. Sure, when do we start!

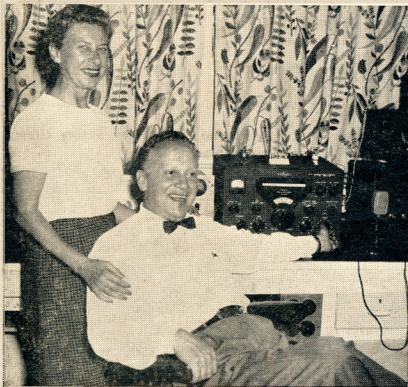

Dr. W. H. Meredith, WSPQA, and his wife photographed in Neville Stilwell's (VK3ACN) shack prior to their departure on Operation Tokelau-ZMTDA.

**CHOOSE THE BEST—IT COSTS NO MORE**



O. T. LEMPRIERE & CO. LIMITED. Head Office: 27-41 Bowden Street, Alexandria, N.S.W.  
and at Melbourne • Brisbane • Adelaide • Perth

## PREDICTION CHART, MAR. '60

Me. E. AUSTRALIA — W. EUROPE S.R. Me.

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

E. AUSTRALIA — W. EUROPE L.R.

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

E. AUSTRALIA — MEDITERRANEAN

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

E. AUSTRALIA — N.W. U.S.A.

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

E. AUSTRALIA — N.E. U.S.A. S.R.

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

E. AUSTRALIA — N.E. U.S.A. L.R.

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

E. AUSTRALIA — CENTRAL AMERICA

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

E. AUSTRALIA — S. AFRICA

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

E. AUSTRALIA — FAR EAST

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

W. AUSTRALIA — W. EUROPE

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

W. AUSTRALIA — N.W. U.S.A.

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

W. AUSTRALIA — N.E. U.S.A.

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

W. AUSTRALIA — S. AFRICA

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								

W. AUSTRALIA — FAR EAST

0	2	4	6	8	10	12	14	16	18	20	22	24
45	28	21	14	7								
45	28	21	14	7								
45	28	21	14	7								



# **Q-PLUS presents . . .**

## **A TRANSISTORISED 30W. D.C.-D.C. CONVERTER**

Suitable for 12V. D.C. Mobile Equipment Operation

### **ELECTRICAL SPECIFICATIONS (FULL LOAD CONDITIONS):**

- ★ D.C. INPUT: 12V. at 3A.
- ★ D.C. OUTPUT: 300V. at 100mA.
- ★ RIPPLE: LESS THAN 0.5%.
- ★ EFFICIENCY: 80-85%.
- ★ DIMENSIONS: 3 $\frac{3}{8}$ " LONG, 3 $\frac{3}{8}$ " WIDE, 2-3/16" HIGH.

**TRADE PRICE**

**£15/8/0**

PLUS 12 $\frac{1}{2}$ % SALES TAX


# **Q-PLUS**

## **14" 110° T.V. KIT**

**Complete with all Valves including Picture Tube, Speaker, Cabinet, Safety Glass and Easy-to-Follow Instruction Manual**

### **NOTE THESE FEATURES:**

- ★ FULLY RATED AND SCREENED POWER TRANSFORMER, USING SILICON DIODE RECTIFIERS (NO "HOT" CHASSIS).
- ★ FULL QUERY SERVICE AVAILABLE AT ALL TIMES.
- ★ ONLY HIGHEST QUALITY COMPONENTS USED.
- ★ INCORPORATING LATEST CIRCUIT DESIGNS, GIVING FULL PERFORMANCE WITH 14 VALVES AND 2 GERMANIUM DIODES.
- ★ THIS KIT IS SUITABLE FOR CONSTRUCTION AS A 17 INCH MODEL WITH SMALL CIRCUIT MODIFICATIONS.
- ★ CHOICE OF CABINET COVERING IN SPECIALLY SELECTED TAN OR BLUE P.V.C. FABRICS.



**99 GNS. COMPLETE**

**FULL PERFORMANCE DATA AND SPECIFICATIONS OF ALL Q-PLUS COMPONENTS ARE AVAILABLE AT ALL TIMES FROM . . .**

# **R. W. STEANE & CO. PTY. LTD.**

Head Office and Factory: **MELBOURNE—2A MONTROSE STREET, HAWTHORN, E.3. WB 3377-8-9.**

Branch Office: **SYDNEY—8 CADOW STREET, PYMBLE. JX 3556.**

Agents: **Adelaide:**

**Wm. T. Matthew Ltd., W 7021**

**Brisbane:**

**Keith Percy & Co. P/L., 2-1757**

**Perth:**

**H. J. McQuillan P/L., BA 8911**









## CORRESPONDENCE

Any opinion expressed under this heading is the individual opinion of the writer and does not necessarily coincide with that of the publishers.

### COMPLIMENT TO JOHN MOYLE

Editor "A.R.," Dear Sir,

May I introduce myself as a fellow Radio Amateur in the United States (WACXA) interested in the attitudes and feelings of other Amateurs regarding their hobby. I had the opportunity to attend most of the recent I.T.U. Administrative Radio Conference in Geneva, Switzerland, on behalf of our broadcasting industry in this country. While there I was privileged to meet and become well acquainted with one of your countrymen, Mr. John Moyle, VK3JU.

I am told that there are quite a few Australian Amateurs who have some doubt as to the wisdom or value of sending Mr. Moyle to Geneva to represent the Amateurs. I am familiar with the situation in Australia prior to the Conference pertaining to the position of the Australian Government in respect to Amateur allocations. Certainly his work at that time, in bringing to light a situation not entirely in keeping with proper procedure, would commend him to most Amateurs who value our frequencies. I don't mind saying that it came as quite a shock to the American Amateurs when we learned of the Australian proposals for reducing the Amateur allocations at Geneva. I am not overlooking at all the fact that the effectiveness of any Amateur organisation or representative is considerably diminished unless the official position of the Government of the country incorporates the considered judgment and feelings of those licensed in the Service. Because the Australian position regarding Amateurs was put forward, it was even more important that Mr. Moyle be on hand at Geneva.

The official record of the Conference will not reflect the tremendous impact and influence that John Moyle had on delegates, not only Australian, but those from other countries as well. John's friendly discussions, clear explanations of the true meaning of Amateur Radio, and his knowledge of the problems of the other services had a great deal to do with the outcome, in my opinion, of the Amateur Radio allocation negotiations at this Conference. No one can say, of course, that had it not been for John the Australian proposal to reduce our 14 Mc. band would have been favorably considered by the Conference. I do believe, however, that John's work with his delegation and others, had considerable influence on the outcome. My personal knowledge of his work there and my high esteem for him as an individual and true Amateur prompted me to write this letter. I sincerely hope that the Australian Amateurs will reassess their thinking on this subject and consider themselves lucky to have an individual of the calibre of John Moyle as their representative in Geneva. That he did such a fine job under trying physical conditions is a high tribute to his devotion to the purpose of his assignment.

My most cordial regards and best wishes to all my friends in your country.

—A. Prose Walker, W4XCA-W2BMX.

## VHF

(Continued from Page 21)

time stations have been worked in this area of VK3 from VK1. Maybe the band is open to other districts than Melbourne at times as Melbourne stations were absent on this occasion. The 10th was quite a night. 72AK went portable to Mt. Wellington and was putting a good signal into Launceston. The VK3 then broke through and two or three had their first VK1 QSO. 72AK managed to work three VK3s, this path being over the Western Tiers, 3,500 ft. high, which would take the end edge of being 4,000 ft. up. The distance would be about 380 miles. VK1 stations operating that night were 78Q, 71LZ, 7PF at Launceston, 7ZAA Burnie, 78L Stanley and 7KAK/7 MT. Wellington. A weak opening on the 30th produced only 3 or VK3 contacts due to QSB. Of interest is the report that from 2130 on Feb. 3, a t.v. viewer at Launceston had another t.v. station besides HSV7 on his t.v. set. It swung the beam but was unable to peak the direction. A few days earlier signs from Mt. Lofly were being received here at good strength on 120 Mc. Maybe the t.v. signal was from VK3.

### TASMANIA 288 MEGACYCLES

Well, all the trouble Col 7LZ has gone to with gear has paid off. On Jan. 7, after QSOs with 3ZAT and 3GCG/3 on 144 Mc. several times, 288 Mc. tests were carried out. 3ZAT gave up but George 3GCG/3 listened for 7LZ again at 2300 and heard Col at RS 58. Col was unable to read George due to the low power he was using, so when 144 Mc. picked up the attempt was abandoned for the night. Now that it was known that Bass Strait was no barrier, it was easy for 7LZ and 3ZAT to have a RS 59 on peaks QSO over the 280-mile path at 2225 on Jan. 10—77F.

## GENERAL NEWS

### VICTORIA

The V.H.F. Group meeting on Jan. 20 was mostly devoted to a discussion on contests and some interesting items were discussed. It was decided to conduct two new contests, one for 144 Mc. enthusiasts, the other for the 6 mX DX gang. The first one is to encourage activity on 144 Mc. and above, to take place during Feb.-Mar. period for one month, a contest to work the greatest number of stations on 144, 288, and above. Stations participating exchange numbers according to the Ross Hull rules. You may work any one station on any one band only once in 24 hours. Generally the rules applying to other contests will apply. For each contact up to 100 miles, one point is scored, for each 50 miles thereafter another point is scored, i.e. 100 miles, pt.; 150 miles, 2 points; 200 miles, 3 pts., and so on. The winner, the station with the highest total points over the contest period.

The second contest is for 50 Mc. operators anywhere who can supply proof of having worked at least one 50 Mc. station in all of the Federal Electorates in Victoria. A special certificate will be awarded to any operator who can manage this feat. This should be of special interest to interstate operators and other DX enthusiasts around VK and perhaps overseas. The contest is open to anyone who works on 5 mX, so who is going to be first?

The VK3 Group hope that other Divisions will follow and organise contests for v.h.f. operators and that it will encourage Amateurs

## DX

(Continued from Page 19)

### QSL RECEIVED

2AMB: CN2BK, CRTZ, FB8X, GCFZC, VRAAC, V5BA4.  
4Q1: VP2SW, ZL3DA (Chatham), EASIA, ZS16, T2WD, CR8X, CRTZ, SM5WN/LA/P, LA3SP/G, UO3AA.  
ZSR: 169 cards for month.

### COMMENTS

This is what some of our DXers say:

2AGH: "I have been informed that the proposed WABED to Africa (the Middle East) has been postponed until later in the year. VK4IA operated from Willis Island during 1955 and 1956; he had only three contacts east of the International date line but many to VK and ZL. HCCC3 is operating from Galapagos." (VK4IA is not active now, but it is said VK3KIB may be able to help with a QSL). 2AGH worked five new countries to bring his total to 248.

3AOM: "I have found conditions a good deal better, as far as 20 mX were concerned. One or two very interesting contacts were made, representing new countries for me. These were VU2ANI, operating in the Andaman Is., and ZMTDA (our old friend VR2QA gone walkabout)."

My thanks also go to 2AMB, 2ZL, 3ACN, 4DO, 4SS, L2022, L2001, L3055, L3072 for help with these notes.

L5030 and L531 have contributed for the first time to the 20 mX band from this month. Please give your names next time.

2AQJ found holidays cut into his DXing and when he did get back from VK5 the heat kept him off the air. Hope you get that 15GN QSL.

L3074 got another 50 Mc. sig; he heard 164 for the month. BERS-195: pleased you got those two new ones; Eric has 263 heard and 248 confirmed. L3065: Good work, Ian, 22 new countries for the month. Note: is good going; you will soon have the 100 up.

Reports on band conditions this month have been very conflicting; some say the bands are the worst for this time of the year for a long time, while others think they are improving. In my case I found them good—worked 63 countries and had 279 DX contacts. Perhaps the worst for holidays for a whole month and not going away did the trick.

DX contests and DXpeditions caused very keen competition among the DX fraternity and it was not until the end of the year that there was a little heated under the collar. For example, a W6 and a VK who were not doing so well in the dog fight over HCBTU, earned brickbats for their 27 minutes QSO right on his frequency.

Thanks for the support and 73 for now, John VK3ZL.

in areas not having v.h.f. calls on the call to come on down to 50 and 144 Mc. and help out in making the bands more useful. Other contests are being planned and it is hoped to have details soon of some regular and some novel awards from VK3—3ZGP.

### QUEENSLAND

Firstly congrats. to Ian 3ZBL and Col 7LZ for the 288 Mc. effort. Max 4HD has made 100 + h.c. contacts with 74M JA2GZ. Good work, anyone else with similar I wonder. Sundry VK3 should make sure the band is not open to anyone before they hold "hate sessions" on 50 Mc. we are not all "mugs" on 6 mX you know. I refer to Jan. 12 from 1540 to 1815 hrs. You blokes could've worked some real nice DX had you investigated. Len 4ZBS made QSO number one on Jan. 10, but wasn't copying me. Welcome back on 6 to Jack 4JO—4ZBL.

### SOUTH AUSTRALIA

Al 5ZCR has a new 6 el. Yagi up 50 ft. and reports all sigs up three S points, must be after those weak JA1 AL. New calls on the band, father and son combination, Joe 5ZCP and Barry 5ZDL. Another new call on 6 is Garry 5ZFM, located at Plympton, running an 832 in the final, excellent signal, too. I understand that an 629B will soon be in use. Curt 5ZBL has a 30 ft. tower coming up. Just the matter of erection and 2 inch water pipe up through the centre when his XYL has picked the last of the cabbages—5ZAW.

## CHOOSE THE BEST—IT COSTS NO MORE

## RESIN CORE SOLDERS

for reliable connections

O. T. LEAMPHERE & CO. LIMITED. Head Office: 27-41 Bowden Street, Alexandria, N.S.W.  
and at Melbourne • Brisbane • Adelaide • Perth

# AMATEUR CALL SIGNS

AMENDMENTS FOR SEPT.-OCT. 1959

## NEW CALL SIGNS

- VK—New South Wales**  
 2DE-D. F. Evans, Ambulance Station, Gundagai.  
 2DS—A. L. Freeman, Leonard St., Inverell.  
 2GU-P. G. Arthurs, 76 Liverpool Rd., Summer Hill.  
 2KM—K. C. Mattei, 10 Albany St., Coffs Harbour.  
 2LM—L. M. Wilson, "Corran," Shelley Beach, Port Macquarie.  
 2VO-V. Molesworth, 8 Jersey Rd., Woolahra.  
 2VQ-W. J. Hart (Dr.), 4/38 Muston St., Mosman.  
 2AIY—B. Barry, 22 High St., Cessnock.  
 2ATL—L. G. Perrett, O.T.C.A. Receiving Centre, Clyde Rd., Bringley.  
 2AZR—R. E. Read, 46 Knowles Ave., Bondi North.  
 2ZCS—A. W. Sullivan, 45 Grantham St., Carlton.  
 2ZGS—J. J. Sullivan, 13 Brooks St., Newcastle.  
 2ZHW—D. R. Woodman, 17 Brookings Ave., Wahroonga.

## Victoria

- 3IJ—D. R. Twigg, 6 Kennedy St., Glenroy.  
 3PC—C. G. Bird, 15 Munro Ave., Edithvale.  
 3QG—C. K. Blake, Station: Henty Highway, 3 miles N.E. of Hopetoun; Postal: Box 162, Hopetoun.  
 3UV—A. J. Turner, 14 Airle Ave., East Prahran.  
 3XK—P. W. Hebard, 18 Wembley Ave., Cheltenham.  
 3XN—B. S. Baulch, "Murraba," Hawkesdale.  
 3KQ—V. H. L. Richardson, 70 Devon Rd., Pascoe Vale.  
 3ZN—J. M. McDonnell, 7 East Como Pde., Mansfield.  
 3AUK—R. M. Kidgell, 308 Waverley Rd., Mt. Waverley.  
 3AZM—H. A. McLachlan, 591 Heatherton Rd., Darnong.  
 3AZT—D. E. Timms, 140 Kent Rd., Hamilton.  
 3ZAJ—K. F. Cody, 14 Lincoln Ave., Oakleigh.  
 3ZCJ—A. W. Beasley, 25 Bishop St., Footscray West.  
 3ZIF—F. F. Scott, 22 Eastview Cres., East Bentleigh.  
 3ZIH—R. S. Hughes, 54 Lascelles St., Coburg.  
 3ZIW—R. C. Whitaker, 58 Vincent St., Sandringham.  
 3ZJA—J. D. Anwin, 3 May St., Deerpene.  
 3ZJB—J. H. Baker, 1 Adam St., Bentleigh.  
 3ZJC—J. R. Edwards, 24 Oswin St., East Kew.  
 3ZJN—H. L. Jenkins, 19 Ransview Gr., North Balwyn.  
 3ZJT—E. M. Timms (Mrs.), 140 Kent Rd., Hamilton.  
 3ZJK—K. B. Webster, 68 Mt. View Pde., Rosanna.

## Queensland

- 4BZ—D. B. Hughes, 66 Balsa St., Inala.  
 4CS—Northern Command Signals, Amateur Radio Club, Signal Training Depot, Keltina Grove.  
 4DX—D. M. Humphreys, 80 Bridgewater St., Morningside.  
 4KY—R. L. Keogh, 114 Hooper St., Townsville.  
 4MQ—C. M. King, Taylor St., Belgian Gardens, Townsville.  
 4QW—C. F. N. Wade, 59 Bennett Rd., The Gap, Ashgrove.  
 4TC—The Townsville Amateur Radio Club, Station: 23 Hughes St., Hermit Park, Townsville; Postal: C/o A. P. Stephenson, 9 Little St., Belgian Gardens, Townsville.  
 4ZCI—R. D. Siver, 26 Jack St., Kedron.  
 4ZCT—J. K. Grant-Thompson, 48 Flower St., Northgate.  
 4ZDS—R. D. Siver, 26 Jack St., Kedron.  
 4ZEB—R. E. Bories, 33 Ellis St., South Brisbane.

## South Australia

- 5DS—D. R. Skinkfield, 7 Derwent Ave., Rosestrevor.  
 5DY—C. J. Tatum, 34 Short Rd., Elizabeth.  
 5EW—W. R. Edwards, Station: N.T.A. Hostel, Alice Springs; Postal: C/o C.S.I.R.O., P.O. Box 17, Alice Springs.  
 5NK—R. J. Knight, 30 Waite St., Blackwood.  
 5QX—J. J. Hunt, 10 Northampton Crescent, Elizabeth East.  
 5WS—F. S. A. Jenkins, 24 Le Hunte St., Wayville.  
 5ZCI—A. L. Goldfinch, 636 Seaview Rd., Grange.  
 5ZCY—E. L. Murray, 11 Holden St., Kensington Park.

## Western Australia

- 6BL—A. J. Bale, 14 Durant Way, Brentwood.  
 6ES—E. Samek, 943 Curran Highway, Applecross.  
 6GR—G. W. Cattach, South West Highway, Yarlwood.  
 6WO—W. R. Ion, 18 Fletcher St., Applecross.  
 6ZCO—L. E. Cox, 16 Oxford St., South Perth.

## Tasmania

- 7ZAO—R. K. Emmett, 6 Haig St., Lenah Valley.  
 7ZBM—G. E. Maxfield, C/o Hydro Electric Commission, Waddamana.

## Territory of Papua and New Guinea

- 9HF—W. J. Fischer (Rev.), Catholic Mission, Kavieng.  
**Antarctica**  
 9AB—G. E. L. Burkett, Wilkes.  
 9BH—N. W. Hanson, Mawson.  
 9ED—K. C. Oldroyd, Deception.  
 9GE—J. G. Bird, Mawson.  
 9WH—H. L. Wright, Macquarie.

## CHANGES OF ADDRESS

- VK—New South Wales**  
 2NL—J. V. Smith, 5 Wrights Ave., Marrickville.  
 2RI—R. L. Litchfield, 100 Avalon Pde., Avalon Beach.  
 2AE—R. W. Allison (Dr.), 96 Wardell Rd., Dulwich Hill.  
 2AOV—T. W. Stewart, 10 Culey Ave., Cooma.  
 2ARQ—A. A. Rayner, 39 McGowen Cres., Liverpool.  
 2ATH—T. L. Hooper, 24 Water St., Wahroonga.  
 2ATY—J. E. Huser, 9 Arnold St., Killara.  
 2ATY—R. W. Best, 27 The Strand, Boronia Park, Gladsville.  
 2AZE—G. R. Stewart, Lot 55, 212 Prince Charles Pde., Kurnell.  
 2AZO—C. Thornthwaite, 33 Myee Cres., Lane Cove.  
 2AZW—W. B. Welley, 57 Darling St., Dubbo.

## Victoria

- 3JD—L. J. Meadows, 9 Dickens St., Hamilton.  
 3DK—K. J. Herd, Portable, Shelbourne Court, Mornington.  
 3QL—S. H. Le Breton, Post Office C/o, Seymour.  
 3VL—R. M. Churchward, Station: C/o V. Honey, Katunga; Postal: P.O. Box 73, Numurkah.  
 3AAN—J. G. Nicholson, 28 William St., Glenroy.  
 3ADI—J. D. Hankin, 4 Esda St., Thornbury.  
 3AL—E. Lawless, 22 Malcolm St., Blackburn.  
 3AOP—G. R. Burrows, 7 Heather St., North Geelong.  
 3AW—W. R. Kelly, Police Station, Warrnambool.  
 3ZAU—H. S. Liuburn, 2 Through Rd., Ringwood.  
 3ZCW—M. White, Fuller St., Ouyen.  
 3ZEW—L. T. Aden, 36 Menin Rd., Forrest Hill.  
 3ZGC—W. R. Badrock, Flat 16, 603 High St., Armadale.

## Queensland

- 4BM—W. J. Mead, 8 Cross St., Mitchelton.  
 4DM—R. J. S. Davis, 121 Francis St., West End, Townsville.  
 4XM—W. A. McDivitt, 49 Jones St., Auchensflower.  
 4YW—G. Whitehead, 80 Hirschfield St., Zillmere North.

## South Australia

- 5AP—H. R. Hodgson, 19 Anstey St., Port Augusta.  
 5KI—K. Postler, Hilltop Ave., Teatree Gully.  
 5KQ—E. T. Park, 46 Cashel St., St. Marys.  
 5WD—R. A. Warner, 7 Hanson St., Adelaide.  
 5ZCC—R. V. Lapidge, 31 Norrman Ave., Coltonville.

## Western Australia

- 6AD—A. W. Stewart, 49 Wiluna St., Mt. Lawley.  
 6FM—R. H. Mould, 23 Gibson St., Mt. Pleasant.  
 6ZAZ—C. G. Andrews, 47 Canterbury Ter., Perth East.  
 6ZBF—R. L. Holman, 39 Lyons St., North Cottesloe.

## Tasmania

- 7AR—A. Doodson, Station: Airport Village, Western Junction; Postal: C/o D.C.A. Free Bag, Launceston.  
 7MZ—H. W. Hancock, 2 Stephen St., East Devonport.

## Territory of Papua and New Guinea

- 9RM—R. H. Murphy, The Hill, Goroka North.  
 9YT—Carl Zimmer (Fr.), Lamekot, P.O. Kavieng.

## CANCELLED CALL SIGNS

- VK—New South Wales**  
 2GR—K. C. Mattei (now VK2KM).  
 2AKN—G. C. T. Harrison.  
 2ALM—J. D. M. Wilson (now VK2LM).  
 2ASJ—J. J. Sullivan.  
 2AKW—C. F. N. Wade (now VK4QW).  
 2AZM—J. D. M. Mole.  
 2ZCJ—C. J. Charnan.  
 2ZCT—J. C. Grant-Thompson (now VK4ZCT).  
 2ZDD—V. Molesworth (now VK2VO).  
 2ZDQ—T. D. A. Meadowcroft.  
 2ZEB—R. E. Birley.  
 2ZJH—W. J. Hart (now VK2YQ).  
 2ZFM—D. R. Stokes.

## Victoria

- 3BC—B. D. Cooper.  
 3OI—R. J. Collins.  
 3UL—M. A. Rodger.  
 3JL—J. Hunt (now VK5QK).  
 3AIS—E. Samek (now VK6ES).  
 3AKS—E. A. King-Smith.  
 3AMG—C. W. Meach.  
 3AQL—C. W. Harwood.  
 3ZCC—N. R. Kay.  
 3ZCL—C. K. Blake (now VK3CG).  
 3ZCQ—B. S. Baulch (now VK3XN).

## Queensland

- 4DT—D. A. Fryer.  
 4IZ—L. A. Griffiths.  
 4XII—H. A. Perkins.  
 4ZBD—D. B. Hughes (now VK4BZ).

## South Australia

- 5MQ—R. E. Read (now VK2AZR).  
 5QL—J. L. Weatherly.

## Western Australia

- 6ZBM—G. E. Maxfield (now VK7ZBM).  
 6ZBT—G. W. Cattach (now VK6GR).

## Tasmania

- 7AJ—A. W. Johnson.  
 7AO—R. K. Emmett.  
 7ZAM—J. R. Milway.

## Territory of Papua and New Guinea

- 9EP—E. P. Black.  
 9BW—W. H. Holland.

## DURALUMIN, ALUMINIUM ALLOY TUBING IDEAL FOR BEAM AERIALS & T.V.

★ LIGHT ★ STRONG ★ NON-CORROSIVE  
 STOCKS NOW AVAILABLE FOR IMMEDIATE DELIVERY  
**ALL DIAMETERS—1" TO 3"**

Price List on Request  
 STOCKISTS OF SHEETS—ALL SIZES AND GAUGES

**GUNNERSSEN ALLEN METALS PTY. LTD.**

88-92 YARRA BANK RD.,  
 STH. MELBOURNE, VIC.

Phone: 69-2121 (10 lines)  
 Telegrams: "Metals," Melb.



HANSON ROAD,  
 WINGFIELD, S.A.

Phone: 4-3362 (4 lines)  
 Telegrams: "Metals," Adel.



## FEDERAL

**Fed. President:** G. M. Hull, VK3ZS.  
**Fed. Asst. Secretary:** W. Mitchell, VK3JUM.  
**Box 2611W, G.P.O., Melbourne, C.I. Vic.**  
**Federal Councillors:**  
 New South Wales—Bob Godsal, VK2ARG.  
 Victoria—Alan Elliott, VK3AEL.  
 Queensland—Arthur Wahl, VK4AW.  
 South Australia—L. H. Duncan, VK3JAX.  
 Western Australia—Ron Huse, VK6KW.  
 Tasmania—E. J. Cruise, VK7EJ.  
 Papua-New Guinea—Russ Coleston, VK9XK.  
**Fed. Contest Committee:** Alan Hubert, VK-TAX, Manager, Box 371B, Hobart, Tas.  
**QSL Bureau:** R. E. Jones, VK3RJ, 23 Landale Street, Box Hill, E.I. Vic.  
**Awards Manager:** A. G. Weynton, VK3XU, 5 York Street, Bonbeach, Vic.

## NEW SOUTH WALES

**President:** Dave Duff, VK3EO.  
**Secretary:** Norm Beard, VK2ALJ. Address mail to Rooms at 14 Altheon Street, St. Leonards, N.S.W.  
**Meeting Night:** Fourth Friday of each month at Science House, Gloucester Street, Sydney.  
**QSL Bureau:** 14 Altheon Street, St. Leonards.  
**Frank Hine, VK3QL, Manager:** assisted by Allan Smith, VK3AE.  
**Zone Correspondents:** North Coast and Tablelands: Noel Hanson, VK1AHH, Ryan Ave. West Gosport; Hunter Region: R. W. Rose, VK2AQR, 17 Brooks St. West Wollend; Coalfields and Lakes: H. Hawkins, VK-2YL, 9 Comfort Av., Cessnock; Western: W. Rust, VK2WJ, "Cambloughs" Forbes; Central Coast & Southern: E. Fisher, VK2DY, 2 Oxlade St., Warrawong; Fifth Western: J. W. S. Edge, VK3AK, Warragamba; South Western: S. Smith, VK2AFS, 50 Upper St., Tamworth.

## VICTORIA

**President:** D. A. Wardlaw, VK3ADW.  
**Secretary:** J. R. Lancaster, VK3JL

## FEDERAL

### GENEVA CONFERENCE

On the evening of 4th Feb., 1960, I attended the usual F.E. meeting, and it was at this meeting that some of the tabulated discussions were presented. I was amazed at the amount of papers which had been forwarded to us for perusal and even these few, which, when stacked on top of each other, would reach a height of approx. four feet, are only part, and a very small part, of the whole proceedings.

We, who have not had the experience of attending a conference such as this, fail to realise the magnitude of work involved in the preparation of such records and this work is doubled when thousands of pages of printed recordings are rendered obsolete daily, and have to be destroyed.

In addition to the printed records, I had the pleasure of looking through the longhand notes made by our representative, John Moyle. These notes, closely written in longhand on foolscap paper, total scores and scores of pages.

John made these copies at night from rough notes taken during the sessions.

It is intended that the printed records of the proceedings be tabulated and filed, and together with those handwritten notes, held for posterity.

### AMERICAN CALL BOOKS

The following issues of the American Call Book are available to members at the price listed:

Winter 1955 (2 copies), 10/- each  
 Spring 1955 (1 copy), 10/-  
 Fall 1957 (1 copy), 15/-  
 Spring 1957 (1 copy), 15/-  
 Winter 1957-58 (1 copy), £1  
 Summer 1958 (1 copy), £1.

Any of the above may be ordered by had by applying to: B. Boase, 65a Franklin Street, Melbourne, Vic., post paid.

### FEDERAL COUNCILLORS

Mr. L. H. Duncan, VK5AX, 16 King Street, Gawler, S.A., has been appointed Federal Councillor for the VK5 Division; vice Mr. Rex Richards, VK5DO.

We of the Federal Executive wish to take this opportunity to pass to Rex Richards our thanks for his co-operation and the sterling job he has done in his appointment over the past years. Thanks Rex and our best wishes go with you for the future.

### T.V.I.

Recently numerous reports have been received that Interstate t.v. ABQ2 (Channel 2



**Administrative Secretary:** Mrs. Trainor, 478 Victoria Parade, East Melbourne, C.I. Postal address: P.O. Box 36, East Melbourne, C.I.  
**Meeting Night:** First Wednesday of each month at the Royal School, Royal Melbourne Technical College.  
**QSL Bureau:** Inwards and Outwards—W.I.A., Vic. Div., P.O. Box 25, East Melbourne, C.I.  
**Zone Correspondents:** Western: W. J. Kinsella, VK3AKW, Magdala, Lubbeck; South Western: W. Wines, 48 Cranley St., Warrnambool; Far North Western: M. Folie, VK3GZ, 101 Lemon Ave., Mildura; Midlands: R. Jonasson, VK3ND, Farnsworth St., Castlemaine; North Eastern: T. K. Tennant, Park St., Tatura; Eastern: W. G. Francis, VK3KZG, 39 Windsor Ave., Moee.  
**QUEENSLAND**  
**President:** D. B. Hughes, VK4BZ.  
**Secretary:** J. F. Wood, VK4VE, Box 63B, G.P.O., Brisbane.  
**Meeting Night:** Fourth Friday in each month at the State Service Union Rooms, Elizabeth Street, Brisbane.  
**Divisional Sub-Editor:** W. J. Raftor, VK4PR, Willandra St., Alderley, Brisbane.  
**QSL Bureau:** Jack Flies, VK4JF, Vanda St., Buranda.  
**Zone Correspondents:** Maryborough: R. J. Clisdon, VK4BG, 59 North St., Maryborough; Townsville: R. K. Wilson, VK4RW, Hogan St., Stuart, Townsville.

**in particular) has been received in Melbourne.**  
 As these openings are of particular interest Federal Executive would like a report on all call openings. All such reports should be forwarded direct to: Davis Rankin, VK3QV, V.h.f. Manager.  
**1960 CONVENTION**  
 The proposed Federal Convention to be held in Melbourne at Easter has been voted out by a majority decision.  
 Federal Councillors have been requested to notify their Divisions that the Convention will not be held.  
**V.I.F. CENTENARY AWARD**  
 Federal Executive would like to pass on their thanks to all who submitted constructive criticism on the proposed V.I.F. Centenary Award recently published in "A.R."

The comments received are at present being collated and when completed, further details will be published in "A.R."

In order to finalise this aspect, F.E. would like further comments, these to reach F.E. no later than 31st March, 1960.

### MAWSON

Flying Officer Norm Hanson has taken out the call VK0BT under which he will operate at Mawson.

Norm has had a varied experience with Amateur Radio and has operated as one could say from the extreme cold, as prior to the trip south, he had been in Malaya and had operated from there.

### FEDERAL AWARDS

Applicants for DXCC who already have credit for Gold Coast (2D4) may not submit Ghana and/or credit for these two are considered to be the same country. Additional credit cannot be given due to change of name where there is no international change.

Applicants are asked to note, however, that Conakry—Republic of Guinea (7C) is considered.

### SILENT KEY

It is with deep regret that we

record the passing of—

VK4AP—Alf Guilford.

## SOUTH AUSTRALIA

**President:** B. W. Austin, VK5CA.  
**Secretary:** J. C. Haseldine, VK5JC, Box 1234K, G.P.O., Adelaide. Telephone: M 7851.  
**Meeting Night:** Second Tuesday of each month at 17 Waymouth St., Adelaide.  
**Divisional Sub-Editor:** W. W. Parsons, VK5PS, 19 Victoria Ave., Rose Park, S.A.  
**QSL Bureau:** G. E. Weston, VK5RA, 27 Belair Rd., West Mitcham, S.A. (Inwards & Outwards).

## WESTERN AUSTRALIA

**President:** L. Roeger, VK6HR.  
**Secretary:** L. S. Eddington, VK6LS, Box N1902, 17 Waymouth St., Adelaide.  
**Meeting Night:** Third Tuesday of month at Perth Tech. College Annex, Mounts Bay Rd.  
**Divisional Sub-Editor:** C. E. J. Sangster, VK6CS, Windsor Hotel, South Perth.  
**QSL Bureau:** Jim Rumble, VK6RU, Box F319, G.P.O., Perth, W.A. (Inwards and Outwards).

## TASMANIA

**President:** Mr. L. R. Jensen, VK7LJ.  
**Secretary:** K. E. Millin, VK7KA, Box 371B, G.P.O., Hobart.  
**Meeting Night:** First Wednesday of each month at W.I.A. Clubroom, 147 Liverpool St., Hobart.  
**Divisional Sub-Editor:** I. Nichols, VK7ZZ, 9 Cressey St., West Town.  
**QSL Bureau:** R. C. Braham, VK7JB, 39 Willowdene Ave., Lower Sandy Bay, Hobart.  
**Zone Correspondent:** North Western Zone—G. Long, VK7TT, Northern Zone—Ray Walden.

## PAPUA-NEW GUINEA

**President:** D. Brown, VK5BS.  
**Secretary:** Roy Taylor, VK5AU, P.O. Box 204, Port Moresby.  
**Meeting Night:** Last Wednesday in each month, R.S.L. Reading Rooms, Elia Beach, Port Moresby.  
**QSL Bureau:** C/o. P.O. Box 204, Port Moresby.

ered to be a new country, inasmuch that it is a sub-division of the large territory known as French West Africa and a very large proportion of the original territory still exists. Credit can still be given for contacts within the area.  
 New applicants for DXCC are asked to note that at this date Certificates cannot be issued as supplies are exhausted. Credit can, however, still be given.

### AMENDMENTS TO DXCC COUNTRIES LIST

Add to the list published in the January issue of "A.R.":

VQ8—Cargados Carajos Shoals .... (39)  
 VJ4—Willis Island .... (30)

Remove from the same list the following:  
 II—Trieste.  
 554—Saar.

G. Weynton, VK3XU, Awards Manager. E.P.S.

## FEDERAL QSL BUREAU

The new address for the Denmark QSL Bureau is: E.D.R. QSL Bureau, Instaprup, Denmark.

**Jack Flies, VK4JF,** invited QSL Manager for the F.E. Division, advised that his attempts to locate Russell Clarke, VK4IC, ex-VK3AGA, have so far been unsuccessful. VK4IC is in great demand since Willis Island is classified as a separate country by the A.R.R.L. However, mail sent to VK4IC's last known address has not been returned.

The Central High School Radio Club, 1212 Nebraska St., Sioux City, Iowa, advise that during the 1960 A.R.R.L. DX Contest they will operate station WLN110 from South Dakota on c.w. in the 14 and 21 Mc. bands on week-ends Feb. 19-21 and March 18-20.

John Kaarsberg, BSW1JW, who hails from Toowoomba, is active with a 35 watt Gelovox on 14 c.w. and phone seeking mainly VK contacts. QSLs are assured, if sent direct to John at 32 Chartwell Drive, Seranong Garden Estate, Singapore.

**OA6KF** has been active since June 1959. Prior to his call, the operator, Evert Kaleveld, operated for 11 years as 2AGX and for two years as OA7I. Often heard on 14 Mc. c.w. and QSLs guaranteed via Box 538, Lima, Peru. Ivan Thomas, VK0IT, one of the 1960 Macaric Island, New Guinea, call signs, the locally manufactured product is vastly superior to "Vic" during the consumption stage, but cannot account for the delayed action and the concertina head effect noticeable on succeeding days.

Len Collett, KZ5C, Box 738, Balboa, C.Z., drew prize in the contest. He has recently held the call signs W0DEA in Missouri and K6DEA in Guam. Len claims he owes his

continued existence to the prompt and effective action of a "digger" at Guadalcanal during W.W.2. This prompts his eager participation in VK-ZL contests and his offer to do the honors for any VK or ZL who passes his way. Please feel free to contact Len by telephone at his office QTH, Balboa 2-3376, or at home. His address will probably be your first customer Len.

1959 issues of "CQ" almost complete are for disposal from this Bureau.

For the period August 1960 to January 1961 inclusive. The remuneration paid in any currency desired. NIL, although it is rumoured that it is to be doubtful.

Al Scarlett, W2CC, known to many VKs and ZLs for 30 years for his prodigious skills with natives of these countries, is having surgery on both legs, months to have have been cut and tied. The surgery isn't worrying Al, but the surgeon's edict that he must not climb stairs for several weeks following the operation has him in a bit of a knot. His shack is in the basement and he wants to know how he can get upstairs again.

Your Federal, QSL Manager is celebrating his imminent retirement from the biggest business organisation in the Commonwealth, after 48 years of toil and shift duty, by treating his spouse and himself to a short tour around the globe by air and sea. Next August next. Outward journey touches at Sydney, Wellington, Tahiti, C.Z., Miami, New York, Bermuda and Cuba. Return journey touches at London, Rome, being made in the Eastern side of U.S.A. After a short European tour and a month doing Great Britain and Northern Ireland, they propose to submerge in London during the summer. Homeward run in January is via Sue, Colombo and Singapore. A few old timers will be visited when opportunity permits. It is reconciled to spending balance of days in the poor house on return.

—Ray Jones, VK3RJ, Manager.

## NEW SOUTH WALES

The monthly meeting of the N.S.W. Division was held at Science House, Gloucester St., Sydney, on 22nd February, 1960, with an attendance of some 38 members and seven visitors being present. The President, Dave 2EO, took the meeting in hand, and after a short address to visitors present, particularly welcoming the attendance of Frank Pearson, VK2ACQ/F from Narrabeen, and Peter Roper, G8MIL, from Southsea, whose ship happened to be in port at this time.

The minutes of the previous meeting were read by the Secretary, Norm RALF, and following a short discussion, a report received from VKs 2TO, 2ZEL and 2AGJ. New members were admitted and amounted to 21, making our total membership at present 108. 2 meetings at 1.14, consisting of 19 life members, 723 full members, and 401 associates.

In dealing with the correspondence, it was recalled that the minutes of the N.S.W. Division A.O.C.P. Correspondence Course, for which there are many enquiries from all over Australia.

Dave 2EO introduced the lecturer for the evening, Peter Griffin, who told his fine and informative lecture, "Navigational Aids at Longueville". This was a most interesting and detailed the aids to navigation which have been used in the past, those in use today, and some which are projected. Non-directional beacons and operations on 201-400 Mc., measuring equipment operating on 206 Mc., visual aerial range showing in detail the use of the compass, and the use of the 100 Mc. Instrument landing system, localisers and glide path controls were all dealt with most effectively, and Peter took great pains to show how the various aids are operated, they are designed and fed. Dealing with a future system, he detailed the merits of the newer decca system, and in the end, he showed how some of the aids which are entirely the product of Australian engineers, assist the authorities to keep the Australian air lanes so safe, despite the numerous dangers of the sea. They carry each day. One important factor of these aids was discussed, the saving of time in handling gliders, which consume so much fuel at low altitudes and points, and a saving of eight minutes on a flight between Sydney and Melbourne would represent some 10 per cent of the flying time.

Following a large number of questions, which indicated the interest taken in this lecture, a vote of thanks was tendered to the lecturer.

On resuming the chair, Dave announced that the Institute members of the Advisory Committee were to be elected, that the year held this office.

members being Leo McMahon, VK2AC; Graham Hall, VK2AGH; and Lyle Woolnough, VK3GW.

Members were reminded that subscriptions would have been due in February, and all details of membership should be sent to this regard should contact the Secretary, 2ALJ, Box 1724, G.P.O., Sydney.

Joe 2HS shared a photograph which he has had done of the report on the foundation meeting of this Division and which took place on 11/3/1916, and presented this framed copy to the President. It was noted that a new administrative building the Division has acquired at 14 Alcherson St., St. Leonards. The building is now under our control and we welcome visitors. Leave the line at St. Leonards station and walk up the hill some 100 yards, turn the corner at the hotel and take the first street on the right. Our new headquarters are some 50 yards on the left hand side. The uses of this building will be many and of great benefit to the Division, and among other activities projected are the A.O.C.P. classes which commenced in February.

The meeting closed at 10.30 p.m. and members and visitors adjourned for coffee and ragewh.

## N.S.W. DIVISION NEW HEADQUARTERS

It will be, by now, common knowledge that the N.S.W. Division has acquired premises which will be used as administrative offices to central and also to house the many smaller meetings of the various groups within the Division. The Division has been provided a room to conduct the A.O.C.P. course.

The night of 4th Feb. saw the first meeting held in the new location, it was a special meeting and was held under the new policies necessary in the running of the venture. The meeting was attended by VKs 2TO, 2ACD, 2CB, 2IM, 2ALJ, 2ZTM, with the President, 2EO, in the chair. The items discussed, it was decided that the registered address of the Division be 14 Alcherson Street, St. Leonards. It was also decided in future that all mail be suitably addressed so that mail can be dealt with speedily. The Box 1724, G.P.O., Sydney, will, however, be retained for the time being, under the many sources of mail have been circulated.

As from the 8/3/60 the A.O.C.P. classes are being held at the new address, which will accommodate many prospective Amateur.

For those who are doubtful of the location, it is within three minutes of St. Leonards station, which is in turn within 15 minutes of Wynyard station. On leaving the station, proceed 100 yards up the Pacific Highway to the hotel, then Alcherson Street branches off to the right. The Division is situated immediately facing the large service station. Visitors will be very welcome.

## HUNTER BRANCH

If there are such things as hen's teeth, well news this month is just as scarce as that. There was no meeting last month, but don't forget our roll-up of the 1959 Annual Meeting on Friday, March 11, at the University of New South Wales, Tighes Hill, at 8 p.m. Unfortunately, I expect to be in VK3 about that time so if anyone can think up a new correspondent it would be appreciated by yours truly as a change is always for the better.

Bob 2AF was visiting the Hunter and QV's shacks recently, leaving a trail of ruttle sands in his wake. Ivan 2AM spent the week-end at the Hunter, and got a good shakedown at billiards. Bill is importing them now, keeping over the Hunter border for a moment, note that the Terrigal Tripe Tampan has disappeared, and the good old 200 Mc. t.v.i. has a list of viewing times of the complainant.

They tell me that Stan 2ZDL is now using his initials as 2AYL. The usual strong force of Hunter boys invaded the Dural "Do" but shewery weather drove many home early. Bill 2AF is still in the market for a chance to win a fortune in a quiz. The joke of the night was when the master of ceremonies tried to entice 2AQR to mount the dais and take the oath of the good old 200 Mc. at the flimsy structure and gave Max the raspberry. However, a good time was had by all and no doubt they were there next year.

## VICTORIA

### SOUTH WESTERN ZONE

The zone is still active and plenty turn up on the Thursday zone hook-up, but it would be better to see a lot more come on as it is a pity that the same old 200 Mc. t.v.i. has to hear that the Ballarat boys have agreed to have the Convention there. I do hope there will be a good turn up from our zone as the Ballarat boys do a good job.

Harry 3XI is back on the air from his new location, so all the 14 Mc. chaps keep their ears open for Harry and give him a shout.

Ted 3PS and Bill are on regularly on 40 mc on 13th March, until 11.30 p.m. will be on most weeks, so listen out for them too.

Bill Wines and Ted 3PS have organised a hoolie convention in Warrnambool, starting on 13th March, until 11.30 p.m. will be on most bands each night from 8 till 9.30 p.m., so chaps give us a few contacts. 3AGE and 3PS will be the lucky ones.

Nothing heard of the Colac boys, but Vic 3ABX has taken up residence so I hope it won't be long before we hear Vic.

The 21st March Convention will be held at Ballarat on Saturday and Sunday, 2nd and 3rd April, 1960. Features include an All-Band 21st March Convention, 20, 6, 10, and 10 mc, and novelty events. Dinner and accommodation bookings (deposit \$10) are to be made to Brian 3ZBS, 17 Daffodil St., Wendouree West, by 25th March.

## QUEENSLAND

### BRISBANE AND DISTRICT

Things always seem to be very quiet at the beginning of the year, and this is no exception. The bands hasn't been anything to write home about. As usual, 21 Mc. seems to be "the band" for the time being. As for the 10 p.m., which is around "lunch time GMT" when the boys over there use a bit of their lunch break for DX.

Activity from Brisbane is low and if it was not for the few regulars like Frank 4ZM, Del 4RJ, Harry 4HA and a few others there would be no activity at all. Harry 4HA will be off the air for a few months as he is on his way to England about the "Fairly" as you read this. He has been in Australia for over 50 years and is going to England to see his wife who is still alive and who lives in London. Do you know, he has brothers in dear old London town whom he has never met. Look out for him, as he is 15 because he will be visiting a lot of the gang in London.

Disposals gear has been rolling in and you have been seeing the first list in "QTC". The tubes are all new and we had them shipped up from VK: at the price, they are a wonderful bargain. The rest of the gear is in nearness to the 10 p.m. band, and when more lists appear in "QTC" because you will only have yourself to blame if you don't get it yet.

Those of you who knew him will know that Ham Radio in VK4 has lost a darned nice bloke with the passing of Alf Guilford, VK4AP. From relieving him of his post about 1960 Alf could be heard holding his own with DX on the c.w. sections of 20 and 10 mc almost every night and he was one of the exceptionally good c.w. operators in the neck of the woods. He could send at over 30 w.p.m., but would QRS to your speed if you couldn't match his fast.

I wish I had a pound for every time he helped me to get back in the immediate post-war period as I only lived a mile or so from him; he must have spent a small fortune calling me. All the time he was in the business and that there was a "rare un" on twenty. Around 1960 he cut down his activity and seemed to be "out from the scene" a year or eighteen months ago he was in the business and kept in the thick of DX hunting until he died in January.

I suppose you regulars on 40 mc have been wondering what Stan 2ZDL has been doing off the band. Stan had had bad luck with the power transformer which supplied his modulator and should be back by the time you read this. He has a new house and is at a north coast beach, with his XYL, having a well earned rest. Jess, his XYL, has recovered after her operation which was done by Dave 4DP.

He will hate me for saying this, but I shrieked with laughter when I saw my pal, Bob 2AF, in the "A.R." for February about that t.v.i. All I can say, Bob, it was ridiculous for the R.I. up there to even bother about that complaint.

As usual we will be having our Annual Palm Beach Convention over the Queen's Birthday week-end and Council has already started to organise. We will be at the beach at Palm Camp at Tallebudgera until three months before the week-end, but I can't see the location there is a possibility of being changed. This year there is a possibility of a t.v. coverage by one of the three Brisbane channels.


Cheers from 4PR.

## TOWNSVILLE

The annual general meeting of the T.A.R.C. held at the residence of 4BX on 28th January was very well attended, although it was quite disappointing to the executive members that

# Famous "TRAP MASTER" Aerials

by **Mosley**



**£48** F.O.R.  
SYDNEY  
Plus 12½% Sales Tax.

Model TA-33-JR (illustrated) is a three-band trap type rotary beam aerial designed to function with equal efficiency on 10, 15 and 20 metre bands. No mechanical switching is needed nor are tuning devices of any sort required. If your rig is capable of working into a 52 ohm load, simply connect a single 52 ohm coax line between transmitter and aerial, tune transmitter to any one of the three bands and sit back to enjoy the finest DX and the most satisfyingly solid contacts of your Ham career!

With proper installation, your TA-33-JR will provide up to 8 db. forward gain over a reference dipole and will offer 25 db. front-to-back ratio. The TA-33-JR will handle up to 300 watts input to the final amplifier at 100% amplitude modulation.

**WORK 3 BANDS - 10, 15 & 20 - EQUALLY WELL with "TRAP MASTER"**

**... DX AERIALS of WORLD RENOWN!**

Australian Agents: MAURICE CHAPMAN and CO. PTY. LTD., 158 Clarence Street, Sydney. BX 5127

## TYPE 65

General purpose with low frequency response suitable for lively halls.

## TYPE 66

P.A. use where less low frequencies are required than the 65 with a lift in the middle frequency to ensure high output without feedback.

## TYPE 67

Communication use, has a further reduction in low frequencies than the 66 and increase in high frequencies for intelligibility through noise.

## THREE INDIVIDUAL TYPES IN THE FAMILIAR "65" CASE

★  
Available in Low (M.D.)  
50 ohms, and High  
(M.A.) Grid Impedance.



### Retail Price including Sales Tax

Type 65 MA	.....	£11/0/7
" 65 MD	.....	£8/19/0
" 66 MA	.....	£11/3/6
" 66 MD	.....	£9/3/0
" 67 MA	.....	£11/3/6
" 67 MD	.....	£9/3/0

**ZEPHYR PRODUCTS PTY. LTD.**

58 HIGH STREET, GLEN IRIS, S.E.6, VICTORIA

PHONES: BL 1300, BL 4556







## FM MOBILE TRANSMITTERS



**AMALGAMATED  
WIRELESS VALVE  
COMPANY PTY. LTD.**

47 YORK ST., SYDNEY

Police . . . ambulances . . . fire brigades . . . electricity supply authorities . . . and other essential services . . . must direct their forces from headquarters in the quickest and most efficient manner. The established line of mobile radio telephones manufactured by AWA already makes this possible by two way radio communication networks. Coverage of whole States, to the point where a car in New England could talk to a car in the Snowy Mountains, is attainable.

Type 2E26 power tetrode provides the RF power transmitted by these mobile radio telephones. The 2E26 is capable of providing more than 20 watts continuously, and above 35 watts in mobile service, at 125 megacycles; and is useful well above this frequency.\*

The *Sigbee* *RADIOTRON* 2E26 is made to strict quality standards at the factory of the Amalgamated Wireless Valve Company at Rydalmere (N.S.W.).

Radio amateurs will find it a useful valve.







# EDDYSTONE



## TRANSMITTING VARIABLE CAPACITORS

A comprehensive range of transmitting variable capacitors, well designed electrically and mechanically, and intended to stand up to continuous usage under all reasonable conditions.


The types include single-section, split-stator, butterfly and differential capacitors, all with a substantially straight line capacitance law.

In every case, insulation is ceramic. The vanes are brass, jig assembled and hard soldered. Thrust washers are beryllium-copper or phosphor

bronze. All metal parts are heavily silver plated.

The single rotor contact obviates the possibility of loops and circulating current. The capacitors are three-hole fixing, the necessary parts (nuts, bolts, washers and distance pieces) being included.


### 2" END-PLATE



Cat. No. 815


Cat. No.	Type	Capacitance (pF.)		Proof Voltage	Air Gap (ins.)
		Min.	Max.		
815	Single Section	7.5	67	1,700	0.048
816	Single Section	9	190	1,000	0.024
817	Single Section	11	270	1,000	0.024
818	Butterfly	6.5 per section	31	1,700	0.048

### 2½" END-PLATES




Cat. No. 835

Cat. No.	Type	Capacitance (pF.)		Proof Voltage	Air Gap (ins.)
		Min.	Max.		
831	Split-Stator	9	28	2,500 per sect.	0.080
832	Split-Stator	9	51	2,500 per sect.	0.080
833	Split-Stator	18	97.4	2,500 per sect.	0.080
834	Differential	8.9	73	2,500 per sect.	0.080
835	Single Section	17.6	237.3	1,250	0.040
836	Single Section	13.6	112	2,500	0.080
837	Butterfly	13.5	53	2,500	0.080
839	Single Section	28	390	1,250	0.040



Cat. No. 816



Cat. No. 836

AVAILABLE FROM ALL EDDYSTONE DISTRIBUTORS

Sole Australian Factory Representatives:

## R. H. CUNNINGHAM PTY. LTD.

VIC.: 8 BROMHAM PLACE, RICHMOND, 42-1614

N.S.W.: 16 ANGAS ST., MEADOWBANK, 80-0316

Q.LD.: 43 BOWEN STREET, BRISBANE, 2-3755

S.A.: 14 STAMFORD COURT, ADELAIDE, 51-6392

W.A.: 10 MELVILLE PDE., 5TH. PERTH, 67-3836

Cable: "Cunnig"